

# COLORADO PXL BAR<sub>16</sub>

## User Manual



Model ID: COLORADOPXLBAR16

## Edition Notes

The COLORado PXL Bar 16 User Manual includes a description, safety precautions, installation, programming, operation, and maintenance instructions for the COLORado PXL Bar 16 as of the release date of this edition.

## Trademarks

Chauvet, Chauvet Professional, the Chauvet logo, and COLORado are registered trademarks or trademarks of Chauvet & Sons, LLC (d/b/a Chauvet and Chauvet Lighting) in the United States and other countries. Other company and product names and logos referred to herein may be trademarks of their respective companies.

## Copyright Notice

The works of authorship contained in this manual, including, but not limited to, all designs, text, and images are owned by Chauvet.

© Copyright 2025 Chauvet & Sons, LLC. All rights reserved.

Electronically published by Chauvet in the United States of America.

## Manual Use

Chauvet authorizes its customers to download and print this manual for professional information purposes only. Chauvet expressly prohibits the usage, copy, storage, distribution, modification, or printing of this manual or its content for any other purpose without written consent from Chauvet.

## Document Printing

For best results, print this document in color, on letter size paper (8.5 x 11 in), double-sided. If using A4 paper (210 x 297 mm), configure the printer to scale the content accordingly.

## Intended Audience

Any person installing, operating, and/or maintaining this product should completely read through the guide that shipped with the product, as well as this manual, before installing, operating, or maintaining this product.

## Disclaimer

Chauvet believes that the information contained in this manual is accurate in all respects. However, Chauvet assumes no responsibility and specifically disclaims any and all liability to any party for any loss, damage, or disruption caused by any errors or omissions in this document, whether such errors or omissions result from negligence, accident or any other cause. Chauvet reserves the right to revise the content of this document without any obligation to notify any person or company of such revision, however, Chauvet has no obligation to make, and does not commit to make, any such revisions.

## Document Revision

Go to [www.chauvetprofessional.com](http://www.chauvetprofessional.com) for the latest version.

Revision	Date	Description
14	7/2025	Updated DMX values for Full PXL Mode

## TABLE OF CONTENTS

<b>1. Before You Begin .....</b>	<b>1</b>
What Is Included .....	1
Claims .....	1
Manual Conventions .....	1
Symbols .....	1
Safety Notes.....	2
FCC Statement of Compliance .....	3
Expected LED Lifespan.....	3
<b>2. Introduction .....</b>	<b>4</b>
Features .....	4
Product Overview.....	5
Product Dimensions .....	6
<b>3. Setup .....</b>	<b>7</b>
AC Power .....	7
AC Plug .....	7
Power Linking.....	7
DMX Linking.....	7
DMX Personalities.....	7
Remote Device Management.....	8
Master/Slave Connectivity.....	8
USB Software Update .....	8
Mounting .....	9
Orientation.....	9
Rigging .....	9
Procedure.....	9
<b>4. Operation .....</b>	<b>10</b>
Control Panel Operation.....	10
Protocol Configuration.....	10
Control Personalities .....	10
Single Control.....	10
Dual Control .....	11
Menu Map .....	12
DMX Values .....	15
Single Control.....	15
Dual Control Movement .....	24
Dual Control Pixels.....	25
Color Chart.....	28
Strobe Chart.....	28
Control Chart.....	28
LED Macro Chart .....	29
Zoom Zones .....	29
Patterns.....	30
Standalone Configuration.....	31
Test Mode .....	31
Setup.....	31
System Information .....	34
Offset Mode.....	34
Tilt .....	34
Zoom .....	34
MAC Address .....	34
Web Server .....	35

Error Codes.....	36
<b>5. Maintenance.....</b>	<b>37</b>
Product Maintenance .....	37
Torque Measurements .....	37
Vacuum Test Measurements .....	37
<b>6. Technical Specifications .....</b>	<b>38</b>
<b>Contact Us .....</b>	<b>39</b>
Warranty & Returns.....	39

# 1. Before You Begin

## What Is Included

- COLORado PXL Bar 16
- Seetronic Powerkon IP65 power cable
- 2 Omega bracket with mounting hardware
- Quick Reference Guide

## Claims

Carefully unpack the product immediately and check the container to make sure all the parts are in the package and are in good condition.





If the box or the contents (the product and included accessories) appear damaged from shipping, or show signs of mishandling, notify the carrier immediately, not Chauvet. Failure to report damage to the carrier immediately may invalidate a claim. In addition, keep the box and contents for inspection.

For other issues, such as missing components or parts, damage not related to shipping, or concealed damage, file a claim with Chauvet within 7 days of delivery.

## Manual Conventions

Convention	Meaning
<b>1–512</b>	A range of values
<b>50/60</b>	A set of values of which only one can be chosen
<b>&lt;SET&gt;</b>	A button on the product's control panel
<b>Settings</b>	A product function or a menu option

## Symbols

Symbol	Meaning
	Electrical warning. Not following these instructions may cause electrical damage to the product, accessories, or the user.
	Critical installation, configuration, or operation information. Not following these instructions may make the product not work, cause damage to the product, or cause harm to the operator.
	Important installation or configuration information. The product may not function correctly if this information is not used.
	Useful information.



**Any reference to data or power connections in this manual assumes the use of Seetronic IP-rated cables.**



**The term “DMX” used throughout this manual refers to the USITT DMX512-A digital data transmission protocol.**

**Connection of the control signal: DMX line**

- The product has XLR sockets for DMX input and output.
- **Notice:** This control circuit is isolated and belongs to the Class 2 data port.

**The control circuit has a cumulative leakage current of less than 3.5 mA.**

## Safety Notes

Read all the following safety notes before working with this product. These notes contain important information about the installation, usage, and maintenance of this product.



**This product contains no user-serviceable parts. Any reference to servicing in this User Manual will only apply to properly trained, certified technicians. Do not open the housing or attempt any repairs.**



**All applicable local codes and regulations apply to proper installation of this product.**

- The luminaire is intended for professional use only.
- If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or its service agent.
- The light source contained in this luminaire shall only be replaced by the manufacturer or its service agent or a similar qualified person.
- **CAUTION:**
  - This product's housing may be hot when operating. Mount this product in a location with adequate ventilation, at least 20 in (50 cm) from adjacent surfaces.
  - When transferring the product from extreme temperature environments, (e.g., cold truck to warm humid ballroom) condensation may form on the internal electronics of the product. To avoid causing a failure, allow the product to fully acclimate to the surrounding environment before connecting it to power.
  - Flashing light is known to trigger epileptic seizures. User must comply with local laws regarding notification of strobe use.
- **ALWAYS:**
  - Disconnect from power before cleaning the product or replacing the fuse.
  - When using an IP65-rated product in an outdoor environment, use IP65- (or higher) rated power and data cable.
  - Replace and secure IP-rated protective covers to all power, data, USB, or other ports when not in use.
  - Replace the fuse with the same type and rating.
  - Use a safety cable when mounting this product overhead.
  - Connect this product to a grounded and protected circuit.
- **DO NOT:**
  - Open this product. It contains no user-serviceable parts.
  - Look at the light source when the product is on.
  - Leave any flammable material within 50 cm of this product while operating or connected to power.
  - Connect this product to a dimmer or rheostat.
  - Operate this product if the housing, lenses, or cables appear damaged.
  - Submerge this product (adhere to standards for the published IP rating). Regular outdoor operation is fine.
  - Permanently install outdoors in locations with extreme environmental conditions. This includes, but is not limited to:
    - Exposure to a marine/saline environment (within 3 miles of a saltwater body of water).
    - Locations where normal temperatures exceed the temperature ranges in this manual.
    - Locations that are prone to flooding or being buried in snow.
    - Other areas where the product will be subject to extreme radiation or caustic substances.
- ONLY use the handles or the hanging/mounting brackets to carry this product.
- The maximum ambient temperature is 113 °F (45 °C). Do not operate this product at higher temperatures.
- The minimum startup temperature is -4°F (-20°C). Do not start the product at lower temperatures.
- The minimum ambient temperature is -22°F (-30°C). Do not operate the product at lower temperatures.
- To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.
- In the event of a serious operating problem, stop using immediately.



**If a Chauvet product requires service, contact Chauvet Technical Support.**

## Before You Begin

---

### FCC Statement of Compliance

This device complies with Part 15 Part B of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### Expected LED Lifespan

Over time, use and heat will gradually reduce LED brightness. Clustered LEDs produce more heat than single LEDs, contributing to shorter lifespans if always used at full intensity. The average LED lifespan is 40,000 to 50,000 hours. To extend LED lifespan, maintain proper ventilation around the product, and limit the overall intensity.


## 2. Introduction

### Features

- IP65-rated motorized tilting batten with (16) 45W RGBW LEDs with a 5.8° to 47.9° zoom range maintains pixel pitch between fixtures
- Quiet and quick operation of 200° tilt and two-section zoom
- Fully pixel mappable
- Several built-in effects, including virtual gobos and movement macros with foreground and background color control for easy pixel animation effects
- DMX, sACN, Art-Net, and Kling-Net control for full flexibility
- RDM enabled for remote addressing and troubleshooting
- 5.8° to 47.9° zoom range for variable beam sizes
- TRUE1-compatible power input/output ports
- IP65-rated 5-pin DMX and TCP/IP input/output ports
- IP65-rated USBc software upload port
- Slotted Omega brackets for easy hanging on truss




## Product Overview

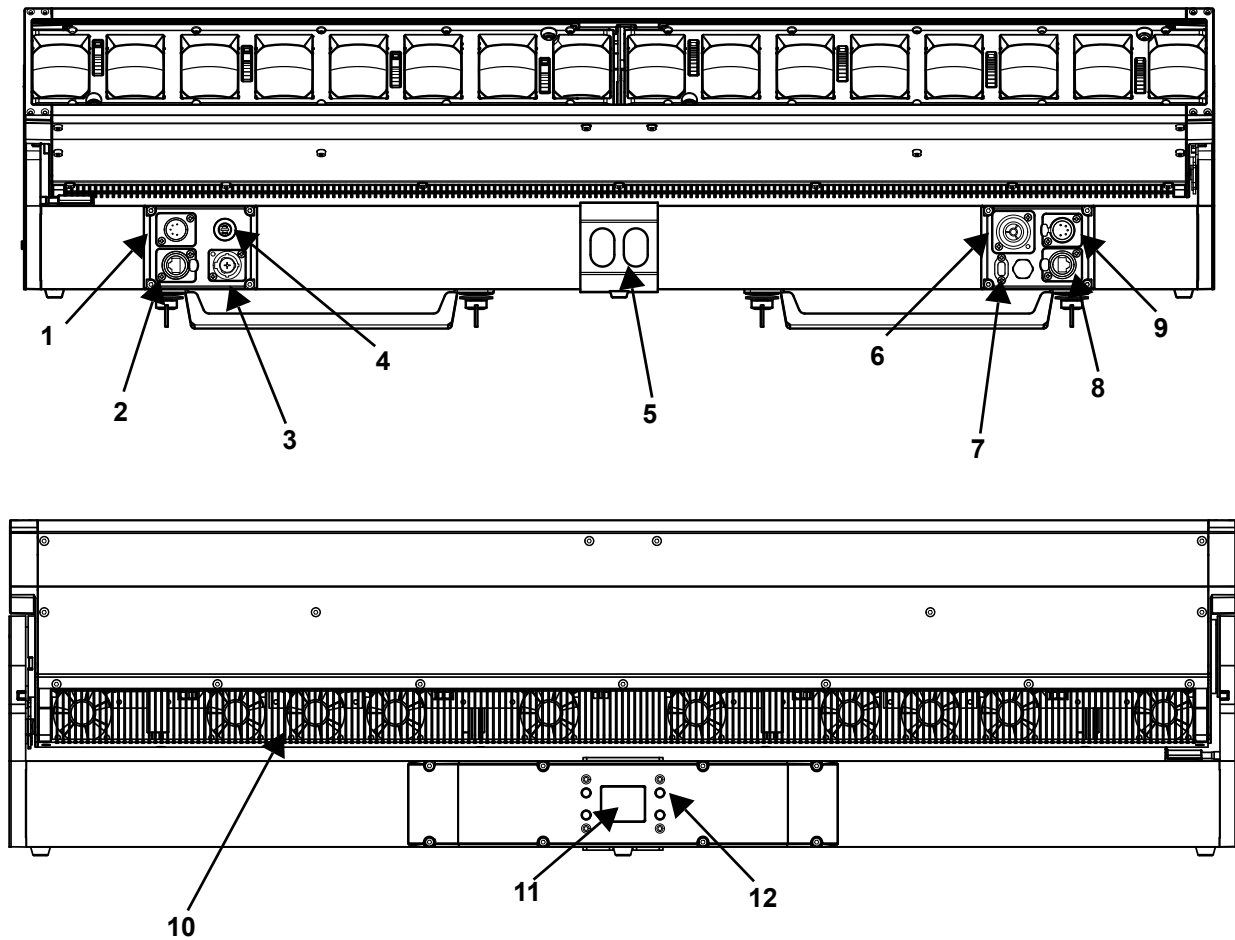

#	Name	#	Name
1	DMX in	7	USB port
2	Network in	8	Network out
3	Seetronic Powerkon in	9	DMX out
4	Fuse holder	10	Fans
5	Safety loop	11	Display
6	Seetronic Powerkon out	12	Menu buttons

## Product Dimensions

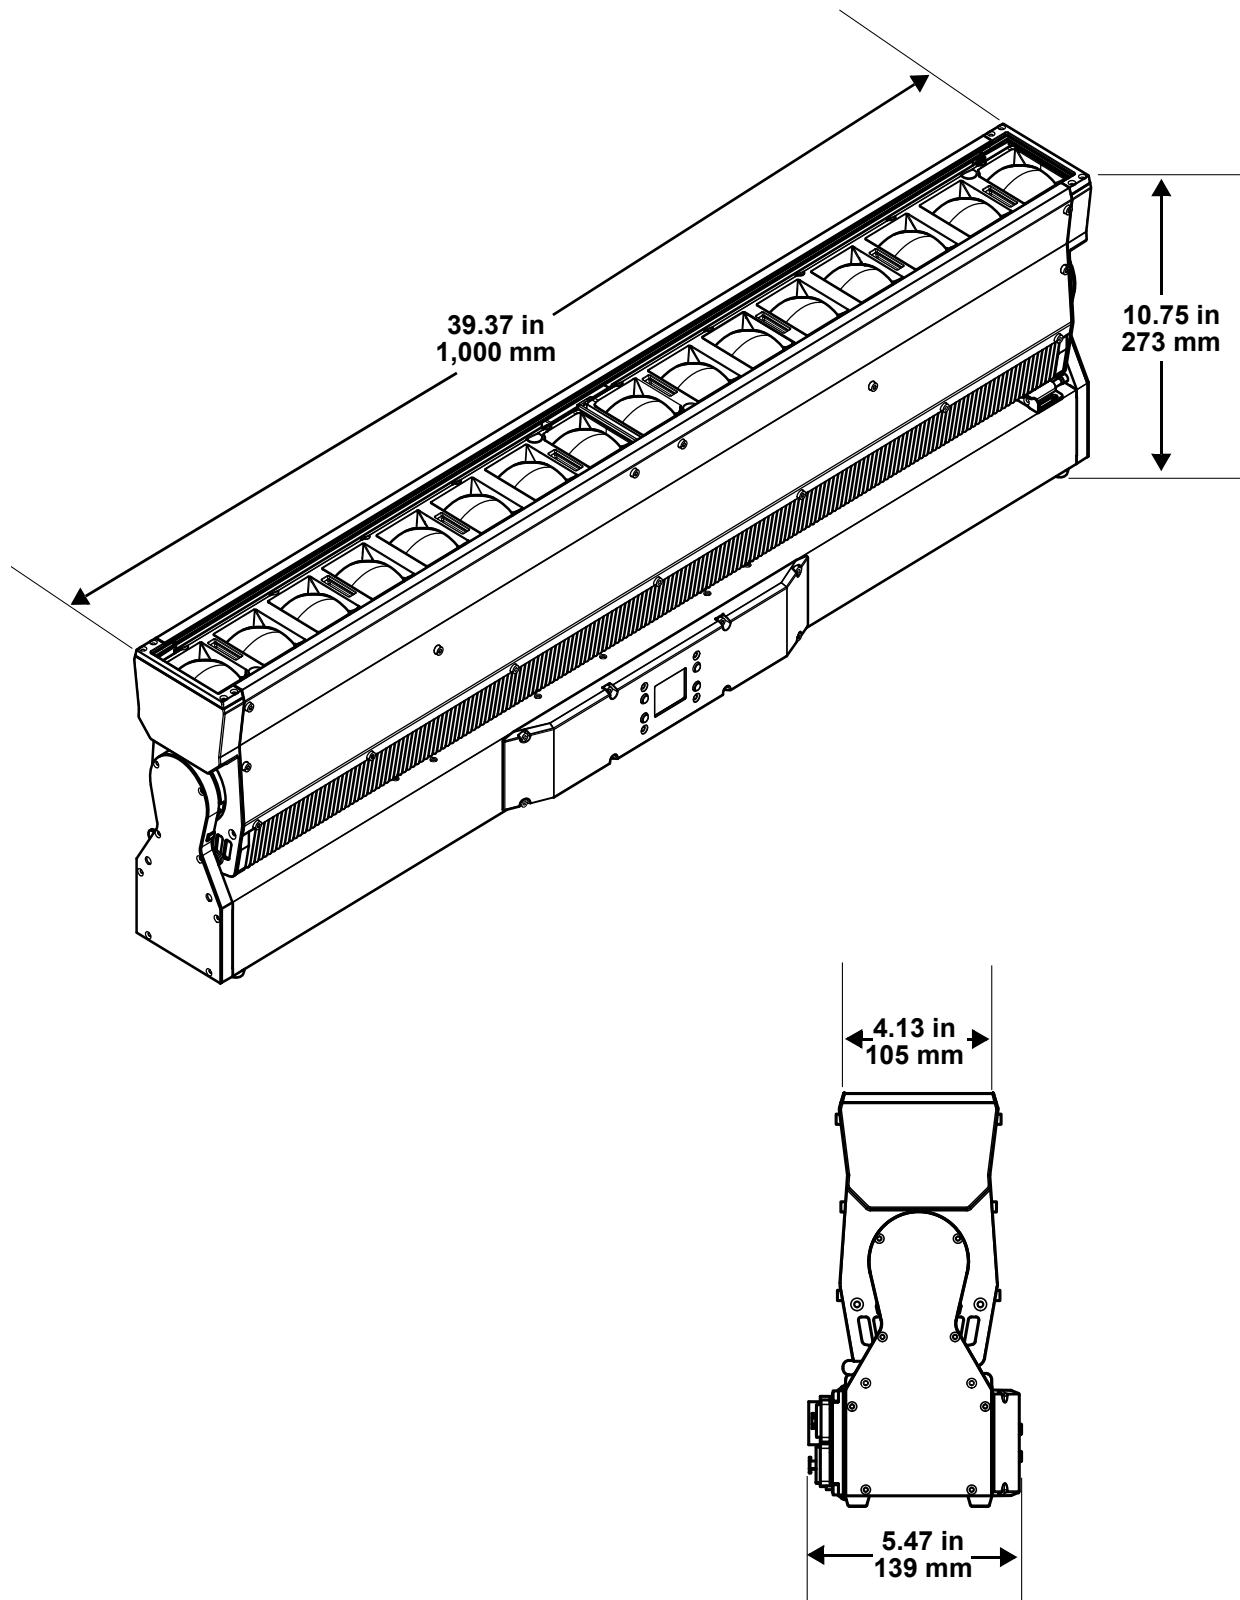

### 3. Setup

#### AC Power

Each COLORado PXL Bar 16 has an auto-ranging power supply that works with an input voltage range of 100 to 240 VAC, 50/60 Hz. To determine the power requirements for each COLORado PXL Bar 16, refer to the label affixed to the product or to the [Technical Specifications](#) chart in this manual.

The listed current rating indicates the maximum current draw during normal operation. For more information, download Sizing Circuit Breakers from the Chauvet website: [www.chauvetprofessional.com](http://www.chauvetprofessional.com).



- **Always connect the product to a protected circuit (a circuit breaker or fuse). Make sure the product has an appropriate electrical ground to avoid the risk of electrocution or fire.**
- **To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.**



**Never connect the product to a rheostat (variable resistor) or dimmer circuit, even if the rheostat or dimmer channel serves only as a 0 to 100% switch.**

#### AC Plug

The COLORado PXL Bar 16 comes with a power input cord terminated with a Seetronic Powerkon A connector on one end and bare wire on the other end (U.S. market). Use the table below to wire the plug.

Connection	Wire (U.S.)	Wire (Europe)	Screw Color
AC Live	Black	Brown	Yellow or Brass
AC Neutral	White	Blue	Silver
AC Ground	Green/Yellow	Green/Yellow	Green

#### Power Linking

This product comes with a power input cord. Power-linking cables are available from Chauvet for purchase. It is possible to power link COLORado PXL Bar 16 products. See the table below for the current draw at each voltage and frequency:

	100 V, 60 Hz	120 V, 60 Hz	208 V, 60 Hz	230 V, 50 Hz	240 V, 50 Hz
<b>Current Draw</b>	8.35 A	6.60 A	3.821 A	3.485 A	3.50 A

Never exceed 12 A on a single circuit. Power-linking cables can be purchased separately



- **To preserve the IP65 rating and the warranty of this product, Seetronic Powerkon cables must be used.**
- **Insert the attached IP65-rated plugs into the corresponding power/data connections when not in use.**

#### DMX Linking

The COLORado PXL Bar 16 can be linked to a DMX controller using a 5-pin DMX connection. If using other DMX-compatible products with this product, each can be controlled individually with a single DMX controller.

#### DMX Personalities

The COLORado PXL Bar 16 uses DMX, Art-Net™, sACN, and Kling-Net for its control personalities:

Single Mode	Dual Mode Movement	Dual Mode Pixels
Basic (20 channels)	Basic (8 channels)	Basic (48 channels)
Standard (84 channels)	Standard (20 channels)	Standard (64 channels)
Advanced (154 channels)	Advanced (26 channels)	Advanced (128 channels)
Full PXL (182 channels)	Basic2 (7 channels)	Uses DMX, Art-Net™, sACN, or Kling-Net
Tour (186 channels)	Uses DMX, Art-Net™, or sACN	
Basic2 (19 channels)		
Uses DMX, Art-Net™, or sACN		



**For more information about DMX standards, Master/Slave connectivity, or the DMX cables needed to link this product to a DMX controller, download the DMX Primer from the Chauvet website: [www.chauvetprofessional.com](http://www.chauvetprofessional.com).**

## Remote Device Management

Remote Device Management (RDM) is a standard for allowing DMX-enabled devices to communicate bi-directionally along existing DMX cabling. Check the DMX controller's User Manual or with the manufacturer, as not all DMX controllers have this capability. The COLORado PXL Bar 16 supports RDM protocol that allows feedback to make changes to menu map options.

## Master/Slave Connectivity

The Master/Slave mode allows an COLORado PXL Bar 16 (the master) to control one or more COLORado PXL Bar 16 products (the slaves) without a DMX controller. One COLORado PXL Bar 16 becomes the master when running an auto program, or by being in Static mode.

Each slave's control panel must be configured to operate in Slave mode. During Master/Slave operation, the slaves will operate in unison with the master.



**DO NOT connect a DMX controller to products operating in Master/Slave mode. The DMX controller signals may interfere with the signals from the master.**



- The [Operation](#) section of this manual provides detailed instructions on how to configure the master and slaves.
- For more information about DMX standards, or the DMX cables needed to link this product to a DMX controller, download the DMX Primer from the Chauvet website: [www.chauvetprofessional.com](http://www.chauvetprofessional.com).

## USB Software Update

The COLORado PXL Bar 16 allows for software updates with a USB device using the built-in USB port. To update the software using a USB flash drive, do the following:

1. Power on the product, and plug the flash drive into the USB port.
2. Once the flash drive has been detected, the message “**USB UPDATE**” will be displayed. Select **YES**.
3. The next screen will show the software versions available for this fixture on the USB drive. For multiple versions of the software for the same fixture, use <UP> or <DOWN> to select the desired version. Press <ENTER>.
4. The “**USB UPDATE**” screen will re-appear. Select **YES**.
5. The upgrade will start. **DO NOT** turn off the power or disconnect the USB while the USB LED is still blinking during the process. The screen display will read: “**USB Update Wait**”. The update can take several minutes to complete.
  - When the USB firmware is done uploading, in some fixtures, the display will change to: “**DO NOT UNPLUG, UPDATING**”.
6. When the update is completed, the fixture will automatically reboot.
7. Go to Fixture Information on the product's menu map and confirm the firmware revision.
8. When the boot-up process is finished, restart the product.



- Place the .chl file in the root directory of the USB drive.
- The product's USB port supports up to 32GB capacity and only works with FAT32 file format.



**Turning off the power or removing the USB while the USB LED is still blinking during the update will cause partial or total firmware failure in the targeted fixture(s). If this occurs, the user will need the UPLOAD 08 device to fix this. Please contact Chauvet regarding this device.**

### Mounting

Before mounting the product, read and follow the safety recommendations indicated in the [Safety Notes](#). For the Chauvet Professional line of mounting clamps, go to <http://trusst.com/products/>.



**The tilt lock is not intended for use during shipping or transportation. It is solely for maintenance purposes.**

### Orientation

Always mount this product in a safe position, making sure there is adequate room for ventilation, configuration, and maintenance.

### Rigging


Chauvet recommends using the following general guidelines when mounting this product.

- Before deciding on a location for the product, always make sure there is easy access to the product for maintenance and programming.
- Make sure that the structure and attachment points can support the weight before hanging the product (see the [Technical Specifications](#)).
- When mounting the product overhead, always use a safety cable. Mount the product securely to a rigging point, whether an elevated platform or a truss.
- When rigging the product onto a truss, use a mounting clamp of appropriate weight capacity.
- When power linking multiple products, mount the products close enough for power-linking cables to reach.

### Procedure

The COLORado PXL Bar 16 comes with a bracket to which the user can attach a mounting clamp directly. Mounting clamps are sold separately. Make sure the clamps are capable of supporting the weight of this product. For the Chauvet Professional line of mounting clamps, go to <http://www.trusst.com/products>.

### Mounting Diagram

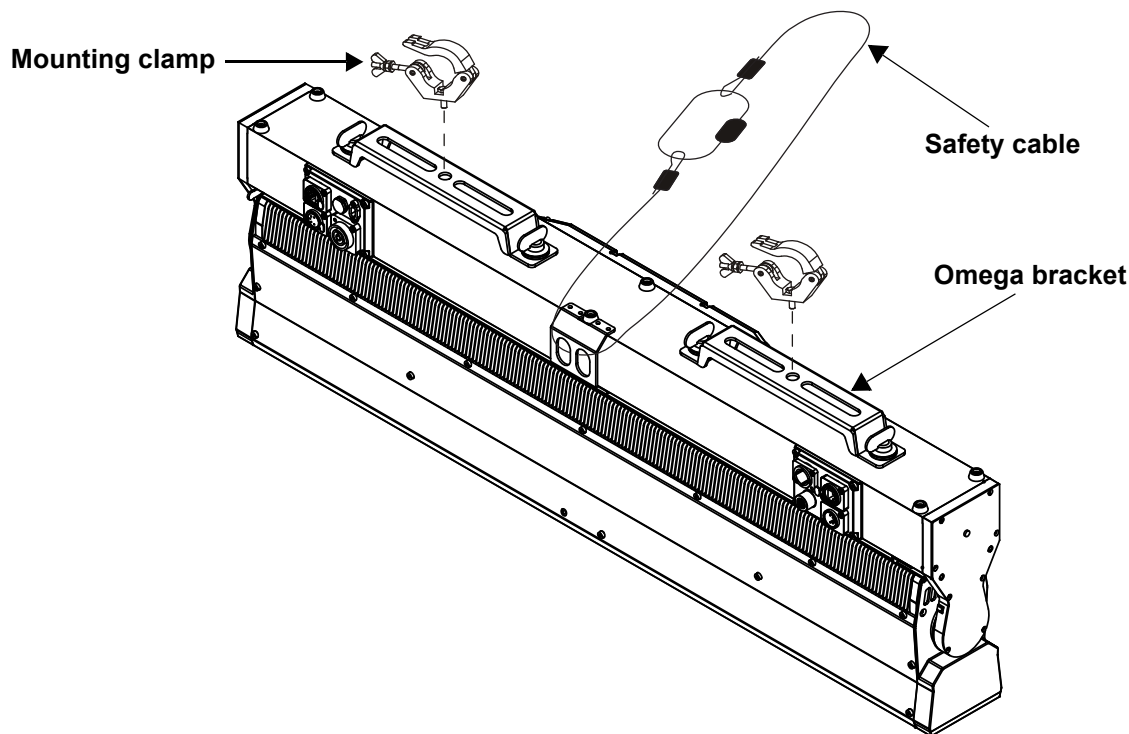

## 4. Operation

### Control Panel Operation

Button	Function
<MENU>	Exits from the current menu or function
<ENTER>	Enables the currently displayed menu or sets the currently selected value in to the current function
<UP>	Navigates upward through the menu list or increases the numeric value when in a function
<DOWN>	Navigates downward through the menu list or decreases the numeric value when in a function

### Protocol Configuration

The COLORado PXL Bar 16 can be set to respond to DMX, Art-Net™, sACN, Kling-Net, or a combination of these protocols. The protocol configuration must be set for the product to respond correctly to the controller(s).

### Control Personalities

The following control personalities are available on the COLORado PXL Bar 16:

Single Mode	Dual Mode Movement	Dual Mode Pixels
Basic (20 channels)	Basic (8 channels)	Basic (48 channels)
Standard (84 channels)	Standard (20 channels)	Standard (64 channels)
Advanced (154 channels)	Advanced (26 channels)	Advanced (128 channels)
Full PXL (182 channels)	Basic2 (7 channels)	Uses DMX, Art-Net™, sACN, or Kling-Net
Tour (186 channels)	Uses DMX, Art-Net™, or sACN	
Basic2 (19 channels)		

### Single Control

In Single Control mode, the COLORado PXL Bar 16 is controlled by a single protocol input. Choose from DMX, Art-Net™, or sACN. In this mode, the four personalities available are: **Basic** (20 channels), **Standard** (84 channels), **Advanced** (154 channels), **Full PXL** (182 channels), **Tour** (186 channels), and **Basic2** (19 channels).

### Single Control Protocol

To select the Single Control protocol, follow the instructions below:

1. Go to the **Address** main level.
2. Select **Single Control**.
3. Choose from the following: **DMX**, **ArtNet**, or **sACN**.

### Single Control Personality

To select the Single Control personality, do the following:

1. Set the [Single Control Protocol](#).
2. Select **Personality**.
3. Choose from the following: **Basic** (20 channels), **Standard** (84 channels), **Advanced** (154 channels), **Full PXL** (182 channels), **Tour** (186 channels), or **Basic2** (19 channels).

### Single Control Start Address

To set the starting address of the Single Control mode, follow the instructions below:

1. Set the [Single Control Protocol](#).
2. Select **Start Address**.
3. Set the desired starting address, from **0–512**.

### Single Control Universe

To set the universe address of the Single Control mode when using Art-Net™ or sACN, do the following:

1. Set the [Single Control Protocol](#).
2. Select **Universe**.
3. Set the desired universe address, from **0–255**.

### Dual Control

In Dual Control mode, the COLORado PXL Bar 16 is controlled by two protocol inputs: one controls the movement, zoom, dimmers, and shutters, whereas the other one controls the individual LED output.

#### Dual Control Movement

The Movement protocol controls the movement of the bar and zoom, and the dimmers and shutters. Choose from DMX, Art-Net™, or sACN. In this mode, the three personalities available are: **Basic** (8 channels), **Standard** (20 channels), **Advanced** (26 channels), and **Basic2** (7 channels).

#### Dual control movement protocol

To select the Dual Control Movement protocol, follow the instructions below:

1. Go to the **Address** main level.
2. Select **Dual Control**.
3. Select **Movement**.
4. Choose from the following: **DMX**, **ArtNet**, or **sACN**.

#### Dual control movement personality

To select the Dual Control Movement personality, do the following:

1. Set the [Dual control movement protocol](#).
2. Select **Personality**.
3. Choose from the following: **Basic** (8 channels), **Standard** (20 channels), **Advanced** (26 channels), or **Basic2** (7 channels).

#### Dual control movement start address

To set the starting address of the Dual Control Movement mode, follow the instructions below:

1. Set the [Dual control movement protocol](#).
2. Select **Start Address**.
3. Set the desired starting address, from **0–512**.

#### Dual control movement universe

To set the universe address of the Dual Control Movement mode when using Art-Net™ or sACN, do the following:

1. Set the [Dual control movement protocol](#).
2. Select **Universe**.
3. Set the desired universe address, from **0–255**.

### Dual Control Pixels

The Pixels protocol controls the individual output of the LEDs. Choose from DMX, Art-Net™, sACN, or Kling-Net. In this mode, the three personalities available are: **Basic** (48 channels), **Standard** (64 channels), and **Advanced** (128 channels).

#### Dual control pixels protocol

To select the Dual Control Pixels protocol, follow the instructions below:

1. Go to the **Address** main level.
2. Select **Dual Control**.
3. Select **Pixels**.
4. Choose from the following: **DMX**, **ArtNet**, **sACN**, or **Kling-Net**.

#### Dual control pixels personality

To select the Dual Control Pixels personality, do the following:

1. Set the [Dual control pixels protocol](#).
2. Select **Personality**.
3. Choose from the following: **Basic** (48 channels), **Standard** (64 channels), or **Advanced** (128 channels).

#### Dual control movement start address

To set the starting address of the Dual Control Pixels mode, follow the instructions below:

1. Set the [protocolDual control pixels protocol](#).
2. Select **Start Address**.
3. Set the desired starting address, from **0–512**.

#### Dual control movement universe

To set the universe address of the Dual Control Pixels mode when using Art-Net™ or sACN, do the following:

1. Set the [protocolDual control pixels protocol](#).
2. Select **Universe**.
3. Set the desired universe address, from **0–255**.

## Menu Map

Refer to the COLORado PXL Bar 16 product page on [www.chauvetprofessional.com](http://www.chauvetprofessional.com) for the latest menu map.

Programming Levels					Description
Address					Address Main Level
Address	Single Control		DMX	Basic	Sets the DMX personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Tour	
				Basic2	
				Full PXL	
			Start Address	0–512	Sets the DMX starting address
			ArtNet	Basic	Sets the Art-Net™ personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Tour	
				Basic2	
				Full PXL	
			Start Address	0–512	Sets the Art-Net™ starting address
			Universe	0–255	Sets the Art-Net™ universe
			sACN	Basic	Sets the sACN personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Tour	
				Basic2	
				Full PXL	
			Start Address	0–512	Sets the sACN starting address
			Universe	0–255	Sets the sACN universe
	Dual Control		DMX	Basic	Sets the DMX personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Basic2	
			Start Address	0–512	Sets the DMX starting address
			ArtNet	Basic	Sets the Art-Net™ personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Basic2	
			Start Address	0–512	Sets the Art-Net™ starting address
			Universe	0–255	Sets the Art-Net™ universe
			sACN	Basic	Sets the sACN personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Basic2	
			Start Address	0–512	Sets the sACN starting address
			Universe	0–255	Sets the sACN universe
			DMX	Basic	Sets the DMX personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Basic2	
			Start Address	0–512	Sets the DMX starting address
			ArtNet	Basic	Sets the Art-Net™ personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
				Basic2	
			Start Address	0–512	Sets the Art-Net™ starting address
			Universe	0–255	Sets the Art-Net™ universe



Programming Levels					Description
Dual Control (cont.)	Pixels (cont.)	sACN	Personality	Basic	Sets the sACN personality (see <a href="#">Control Personalities</a> )
				Standard	
				Advanced	
			Start Address	0–512	Sets the sACN starting address
		Universe	0–255	Sets the sACN universe	
		KlingNet	Personality	Basic	Sets the Kling-Net personality (see <a href="#">Control Personalities</a> )
Standard					
Main Level	Programming Levels				Description
Run Mode	Manual Test	Auto Test			Auto test all functions
		000–255	Tilt	Manually control and test all settings through the control panel	
			P/T Speed		
			Red		
			Green		
			Blue		
			White		
			CTC		
			Color		
			Pattern		
			LED Macro		
			LED Ma. Speed		
			LED Ma. Fade		
			Background		
			Background Dim.		
			Dimmer		
			Shutter		
			Function		
			Zoom1		
			Zoom2		
Setup	Network Settings	IP Mode		Manual	Manually sets IP address
				DHCP	Network sets IP address
				Static	Product sets IP address
		IP	IP Byte 1–4	000–255	Sets IP address in manual mode
		SMK	SubMask 1–4	000–255	Sets Subnet Mask in manual mode
	Tilt Reverse	NO		Normal tilt	
		YES		Reversed tilt	
	Tilt Function	NO		Enables/disables tilt	
		YES			
	Zoom Reverse	NO		Normal zoom	
		YES		Reversed zoom	
	Screen Reverse	NO		Normal display	
		YES		Inverted display	
		AUTO		Automatic display orientation	
	Tilt Angle	200		200° tilt range	
		180		180° tilt range	
		60		60° tilt range	
	BL. O. T Move	NO		Do not blackout while tilt	
		YES		Blackout while tilt	
	Backlight Timer	30S		Display turns off after 30 seconds	
		1M		Display turns off after 1 minute	
		5M		Display turns off after 5 minutes	
		ON		Display stays on	
	Loss of Data	Hold		Holds last signal received	
		Close		Blacks out fixture	

Main Level	Programming Levels		Description
Setup (cont)	Fans	Auto	Fan speed according to product temperature
		Full	Fan speed set on high
		ECO	Quiet mode
	Defrost Fan	OFF	Activate defrost fan
		ON	Deactivate defrost fan
	C Mixing Mode	RGBW	RGBW mode (additive)
		CMY	CMY mode (subtractive)
	Dimmer Curve	Linear	Set the dimmer curve
		Square	
		I Squa	
		SCurve	
	Dimmer Speed	Smooth	Set the dimmer speed
		Fast	
	PWM Option	600Hz	Sets the Pulse Width Modulation frequency
		1200Hz	
		2000Hz	
		4000Hz	
		6000Hz	
		15000Hz	
	Cell Order	1–16	Light activates from left to right
		16–1	Light activates from right to left
	Calibrated White	ON	Default light output temperature set to 7500K
		OFF	Deactivates calibrated white setting
		Custom	Adjust light output temperature using White Balance setting
	White Balance	Red	000–255 Sets red LED maximum value
		Green	
		Blue	
		White	
	Preset Select	PRESET A	Recorded preset menu options
		PRESET B	
		PRESET C	
	Preset Sync	NO	Allows recorded preset menu options to be transferred to other COLORado PXL Bar 16 in the DMX daisy chain
		YES	
	USB Update	NO	Enables/disables updating by USB
		YES	
	Reset Function	Tilt	NO
			YES
		Zoom	NO
			YES
		All	NO
			YES
	Factory Settings	NO	Reset to factory default settings
		YES	

Main Level	Programming Levels		Description
Information	Firmware Version	V1.230522	Shows firmware version
	Running Mode	---	Shows current running mode
	Address	---	Shows current starting address
	Temperature	---	Shows current product temperature in °C
	Fixture Time	-----	Shows number of hours product has been powered on
	LED Hours	-----	Shows total hours the LED has been powered on
	ArtNet Info	Ip	Shows current IP address
		SubMask	Shows current Subnet Mask
		MAC	Shows current MAC address
	Device UID		Shows product UID
	Fan Information	Head Fan 1–10	Shows speed of head fans 1–10 in rpm
		Defrost Fan 1–2	Shows speed of defrost fans 1–2 in rpm
		Base Fan 1–2	Shows speed of base fans 1–2 in rpm

## DMX Values

### Single Control

#### Basic2 (19CH)

Channel	Function	Value	Percent/Setting
1	Tilt	000 ⇄ 255	0–100%
2	Fine tilt	000 ⇄ 255	0–100%
3	Tilt speed	000 ⇄ 255	0–100%
4	CTC	000 001 ⇄ 255	No function Color temperature, 1900–2700 K
5	Color	000 ⇄ 255	see <a href="#">Color Chart</a>
6	Patterns (see <a href="#">Patterns</a> )	000 001 ⇄ 255	No function Pattern 1–255
7	LED macro	000 ⇄ 255	see <a href="#">LED Macro Chart</a>
8	LED macro speed	000 ⇄ 127 128 129 ⇄ 255	Auto speed, fast to slow clockwise Stop Auto speed, slow to fast counterclockwise
9	LED macro delay	000 ⇄ 255	Fast to slow
10	Background color	000 ⇄ 255	see <a href="#">Color Chart</a>
11	Background color dimmer	000 ⇄ 255	0–100%
12	Dimmer	000 ⇄ 255	0–100%
13	Strobe	000 ⇄ 255	see <a href="#">Strobe Chart</a>
14	Zoom	000 ⇄ 255	Zoom in to zoom out
15	Control	000 ⇄ 255	see <a href="#">Control Chart</a>
16	Red	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
17	Green	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
18	Blue	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
19	White	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%



The “Single Control: Basic2” personality of the COLORado PXL Bar 16 exactly matches the “Single Control: Basic” personality of the COLORado PXL Bar 8.

## Tour (186CH) / Advanced (154CH) / Standard (84CH) / Basic (20CH)

20 CH	84 CH	154 CH	186 CH	Function	Value	Percent/Setting
1	1	1	1	Tilt	000 ⇄ 255	0–100%
2	2	2	2	Fine tilt	000 ⇄ 255	0–100%
3	3	3	3	Tilt speed	000 ⇄ 255	0–100%
4	4	4	4	CTC	000 001 ⇄ 255	No function Color temperature, 1900–2700 K
5	5	5	5	Color	000 ⇄ 255	see <a href="#">Color Chart</a>
6	6	6	6	Patterns (see <a href="#">Patterns</a> )	000 001 ⇄ 255	No function Pattern 1–255
7	7	7	7	LED macro	000 ⇄ 255	see <a href="#">LED Macro Chart</a>
8	8	8	8	LED macro speed	000 ⇄ 127 128 129 ⇄ 255	Auto speed, fast to slow clockwise Stop Auto speed, slow to fast counterclockwise
9	9	9	9	LED macro delay	000 ⇄ 255	Fast to slow
10	10	10	10	Background color	000 ⇄ 255	see <a href="#">Color Chart</a>
11	11	11	11	Background color dimmer	000 ⇄ 255	0–100%
–	–	12	12	Background color fine dimmer	000 ⇄ 255	0–100%
12	12	13	13	Dimmer	000 ⇄ 255	0–100%
–	–	14	14	Fine dimmer	000 ⇄ 255	0–100%
13	13	15	15	Strobe	000 ⇄ 255	see <a href="#">Strobe Chart</a>
14	14	16	16	Zoom 1 (see <a href="#">Zoom Zones</a> )	000 ⇄ 255	Zoom in to zoom out (Zone 1)
15	15	17	17	Zoom 2 (see <a href="#">Zoom Zones</a> )	000 ⇄ 255	Zoom in to zoom out (Zone 2)
16	16	18	18	Control	000 ⇄ 255	see <a href="#">Control Chart</a>
17	17	19	19	Main red	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	20	20	Main fine red	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
18	18	21	21	Main green	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	22	22	Main fine green	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
19	19	23	23	Main blue	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	24	24	Main fine blue	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
20	20	25	25	Main white	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	26	26	Main fine white	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	27	Dimmer 1	000 ⇄ 255	0–100%
–	–	–	28	Fine dimmer 1	000 ⇄ 255	0–100%
–	21	27	29	Red 1      Cyan 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	28	30	Fine red 1      Fine cyan 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	22	29	31	Green 1      Magenta 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	30	32	Fine green 1      Fine magenta 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	23	31	33	Blue 1      Yellow 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	32	34	Fine blue 1      Fine yellow 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	24	33	35	White 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	34	36	Fine white 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	37	Dimmer 2	000 ⇄ 255	0–100%
–	–	–	38	Fine dimmer 2	000 ⇄ 255	0–100%
–	25	35	39	Red 2      Cyan 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	36	40	Fine red 2      Fine cyan 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	26	37	41	Green 2      Magenta 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	38	42	Fine green 2      Fine magenta 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	27	39	43	Blue 2      Yellow 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	40	44	Fine blue 2      Fine yellow 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

20 CH	84 CH	154 CH	186 CH	Function	Value	Percent/Setting
–	28	41	45	White 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	42	46	Fine white 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	47	Dimmer 3	000 ⇔ 255	0–100%
–	–	–	48	Fine dimmer 3	000 ⇔ 255	0–100%
–	29	43	49	Red 3      Cyan 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	44	50	Fine red 3    Fine cyan 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	30	45	51	Green 3      Magenta 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	46	52	Fine green 3    Fine magenta 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	31	47	53	Blue 3      Yellow 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	48	54	Fine blue 3    Fine yellow 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	32	49	55	White 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	50	56	Fine white 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	57	Dimmer 4	000 ⇔ 255	0–100%
–	–	–	58	Fine dimmer 4	000 ⇔ 255	0–100%
–	33	51	59	Red 4      Cyan 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	52	60	Fine red 4    Fine cyan 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	34	53	61	Green 4      Magenta 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	54	62	Fine green 4    Fine magenta 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	35	55	63	Blue 4      Yellow 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	56	64	Fine blue 4    Fine yellow 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	36	57	65	White 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	58	66	Fine white 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	67	Dimmer 5	000 ⇔ 255	0–100%
–	–	–	68	Fine dimmer 5	000 ⇔ 255	0–100%
–	37	59	69	Red 5      Cyan 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	60	70	Fine red 5    Fine cyan 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	38	61	71	Green 5      Magenta 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	62	72	Fine green 5    Fine magenta 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	39	63	73	Blue 5      Yellow 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	64	74	Fine blue 5    Fine yellow 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	40	65	75	White 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	66	76	Fine white 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	77	Dimmer 6	000 ⇔ 255	0–100%
–	–	–	78	Fine dimmer 6	000 ⇔ 255	0–100%
–	41	67	79	Red 6      Cyan 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	68	80	Fine red 6    Fine cyan 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	42	69	81	Green 6      Magenta 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	70	82	Fine green 6    Fine magenta 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	43	71	83	Blue 6      Yellow 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	72	84	Fine blue 6    Fine yellow 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	44	73	85	White 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	74	86	Fine white 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	87	Dimmer 7	000 ⇔ 255	0–100%
–	–	–	88	Fine dimmer 7	000 ⇔ 255	0–100%
–	45	75	89	Red 7      Cyan 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	76	90	Fine red 7    Fine cyan 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	46	77	91	Green 7      Magenta 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	78	92	Fine green 7    Fine magenta 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

20 CH	84 CH	154 CH	186 CH	Function	Value	Percent/Setting
–	47	79	93	Blue 7      Yellow 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	80	94	Fine blue 7   Fine yellow 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	48	81	95	White 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	82	96	Fine white 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	97	Dimmer 8	000 ⇄ 255	0–100%
–	–	–	98	Fine dimmer 8	000 ⇄ 255	0–100%
–	49	83	99	Red 8      Cyan 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	84	100	Fine red 8   Fine cyan 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	50	85	101	Green 8      Magenta 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	86	102	Fine green 8   Fine magenta 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	51	87	103	Blue 8      Yellow 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	88	104	Fine blue 8   Fine yellow 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	52	89	105	White 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	90	106	Fine white 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	107	Dimmer 9	000 ⇄ 255	0–100%
–	–	–	108	Fine dimmer 9	000 ⇄ 255	0–100%
–	53	91	109	Red 9      Cyan 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	92	110	Fine red 9   Fine cyan 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	54	93	111	Green 9      Magenta 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	94	112	Fine green 9   Fine magenta 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	55	95	113	Blue 9      Yellow 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	96	114	Fine blue 9   Fine yellow 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	56	97	115	White 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	98	116	Fine white 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	117	Dimmer 10	000 ⇄ 255	0–100%
–	–	–	118	Fine dimmer 10	000 ⇄ 255	0–100%
–	57	99	119	Red 10      Cyan 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	100	120	Fine red 10   Fine cyan 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	58	101	121	Green 10      Magenta 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	102	122	Fine green 10   Fine magenta 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	59	103	123	Blue 10      Yellow 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	104	124	Fine blue 10   Fine yellow 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	60	105	125	White 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	106	126	Fine white 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	127	Dimmer 11	000 ⇄ 255	0–100%
–	–	–	128	Fine dimmer 11	000 ⇄ 255	0–100%
–	61	107	129	Red 11      Cyan 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	108	130	Fine red 11   Fine cyan 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	62	109	131	Green 11      Magenta 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	110	132	Fine green 11   Fine magenta 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	63	111	133	Blue 11      Yellow 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	112	134	Fine blue 11   Fine yellow 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	64	113	135	White 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	114	136	Fine white 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	137	Dimmer 12	000 ⇄ 255	0–100%
–	–	–	138	Fine dimmer 12	000 ⇄ 255	0–100%
–	65	115	139	Red 12      Cyan 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	116	140	Fine red 12   Fine cyan 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

20 CH	84 CH	154 CH	186 CH	Function	Value	Percent/Setting
–	66	117	141	Green 12      Magenta 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	118	142	Fine green 12      Fine magenta 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	67	119	143	Blue 12      Yellow 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	120	144	Fine blue 12      Fine yellow 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	68	121	145	White 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	122	146	Fine white 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	147	Dimmer 13	000 ⇄ 255	0–100%
–	–	–	148	Fine dimmer 13	000 ⇄ 255	0–100%
–	69	123	149	Red 13      Cyan 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	124	150	Fine red 13      Fine cyan 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	70	125	151	Green 13      Magenta 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	126	152	Fine green 13      Fine magenta 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	71	127	153	Blue 13      Yellow 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	128	154	Fine blue 13      Fine yellow 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	72	129	155	White 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	130	156	Fine white 13	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	157	Dimmer 14	000 ⇄ 255	0–100%
–	–	–	158	Fine dimmer 14	000 ⇄ 255	0–100%
–	73	131	159	Red 14      Cyan 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	132	160	Fine red 14      Fine cyan 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	74	133	161	Green 14      Magenta 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	134	162	Fine green 14      Fine magenta 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	75	135	163	Blue 14      Yellow 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	136	164	Fine blue 14      Fine yellow 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	76	137	165	White 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	138	166	Fine white 14	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	167	Dimmer 15	000 ⇄ 255	0–100%
–	–	–	168	Fine dimmer 15	000 ⇄ 255	0–100%
–	77	139	169	Red 15      Cyan 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	140	170	Fine red 15      Fine cyan 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	78	141	171	Green 15      Magenta 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	142	172	Fine green 15      Fine magenta 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	79	143	173	Blue 15      Yellow 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	144	174	Fine blue 15      Fine yellow 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	80	145	175	White 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	146	176	Fine white 15	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	–	177	Dimmer 16	000 ⇄ 255	0–100%
–	–	–	178	Fine dimmer 16	000 ⇄ 255	0–100%
–	81	147	179	Red 16      Cyan 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	148	180	Fine red 16      Fine cyan 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	82	149	181	Green 16      Magenta 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	150	182	Fine green 16      Fine magenta 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	83	151	183	Blue 16      Yellow 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	152	184	Fine blue 16      Fine yellow 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	84	153	185	White 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	154	186	Fine white 16	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

## Full PXL (182CH)

Channel	Function		Value	Percent/Setting
1	Tilt		000 ⇔ 255	0–100%
2	Fine tilt		000 ⇔ 255	0–100%
3	Tilt speed		000 ⇔ 255	0–100%
4	Zoom 1 (see <a href="#">Zoom Zones</a> )		000 ⇔ 255	Zoom in to zoom out (Zone 1)
5	Zoom 2 (see <a href="#">Zoom Zones</a> )		000 ⇔ 255	Zoom in to zoom out (Zone 2)
6	Control		000 ⇔ 255	see <a href="#">Control Chart</a>
7	Dimmer 1		000 ⇔ 255	0–100%
8	Fine dimmer 1		000 ⇔ 255	0–100%
9	Strobe 1		000 ⇔ 255	see <a href="#">Strobe Chart</a>
10	Red 1	Cyan 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
11	Fine red 1	Fine cyan 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
12	Green 1	Magenta 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
13	Fine green 1	Fine magenta 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
14	Blue 1	Yellow 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
15	Fine blue 1	Fine yellow 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
16	White 1		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
17	Fine white 1		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
18	Dimmer 2		000 ⇔ 255	0–100%
19	Fine dimmer 2		000 ⇔ 255	0–100%
20	Strobe 2		000 ⇔ 255	see <a href="#">Strobe Chart</a>
21	Red 2	Cyan 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
22	Fine red 2	Fine cyan 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
23	Green 2	Magenta 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
24	Fine green 2	Fine magenta 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
25	Blue 2	Yellow 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
26	Fine blue 2	Fine yellow 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
27	White 2		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
28	Fine white 2		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
29	Dimmer 3		000 ⇔ 255	0–100%
30	Fine dimmer 3		000 ⇔ 255	0–100%
31	Strobe 3		000 ⇔ 255	see <a href="#">Strobe Chart</a>
32	Red 3	Cyan 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
33	Fine red 3	Fine cyan 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
34	Green 3	Magenta 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
35	Fine green 3	Fine magenta 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
36	Blue 3	Yellow 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
37	Fine blue 3	Fine yellow 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
38	White 3		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
39	Fine white 3		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
40	Dimmer 4		000 ⇔ 255	0–100%
41	Fine dimmer 4		000 ⇔ 255	0–100%
42	Strobe 4		000 ⇔ 255	see <a href="#">Strobe Chart</a>
43	Red 4	Cyan 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
44	Fine red 4	Fine cyan 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
45	Green 4	Magenta 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%



Channel	Function		Value	Percent/Setting
46	Fine green 4	Fine magenta 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
47	Blue 4	Yellow 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
48	Fine blue 4	Fine yellow 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
49	White 4		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
50	Fine white 4		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
51	Dimmer 5		000 ⇔ 255	0–100%
52	Fine dimmer 5		000 ⇔ 255	0–100%
53	Strobe 5		000 ⇔ 255	see <a href="#">Strobe Chart</a>
54	Red 5	Cyan 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
55	Fine red 5	Fine cyan 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
56	Green 5	Magenta 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
57	Fine green 5	Fine magenta 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
58	Blue 5	Yellow 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
59	Fine blue 5	Fine yellow 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
60	White 5		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
61	Fine white 5		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
62	Dimmer 6		000 ⇔ 255	0–100%
63	Fine dimmer 6		000 ⇔ 255	0–100%
64	Strobe 6		000 ⇔ 255	see <a href="#">Strobe Chart</a>
65	Red 6	Cyan 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
66	Fine red 6	Fine cyan 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
67	Green 6	Magenta 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
68	Fine green 6	Fine magenta 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
69	Blue 6	Yellow 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
70	Fine blue 6	Fine yellow 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
71	White 6		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
72	Fine white 6		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
73	Dimmer 7		000 ⇔ 255	0–100%
74	Fine dimmer 7		000 ⇔ 255	0–100%
75	Strobe 7		000 ⇔ 255	see <a href="#">Strobe Chart</a>
76	Red 7	Cyan 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
77	Fine red 7	Fine cyan 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
78	Green 7	Magenta 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
79	Fine green 7	Fine magenta 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
80	Blue 7	Yellow 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
81	Fine blue 7	Fine yellow 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
82	White 7		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
83	Fine white 7		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
84	Dimmer 8		000 ⇔ 255	0–100%
85	Fine dimmer 8		000 ⇔ 255	0–100%
86	Strobe 8		000 ⇔ 255	see <a href="#">Strobe Chart</a>
87	Red 8	Cyan 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
88	Fine red 8	Fine cyan 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
89	Green 8	Magenta 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
90	Fine green 8	Fine magenta 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

Channel	Function		Value	Percent/Setting
91	Blue 8	Yellow 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
92	Fine blue 8	Fine yellow 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
93	White 8		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
94	Fine white 8		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
95	Dimmer 9		000 ⇔ 255	0–100%
96	Fine dimmer 9		000 ⇔ 255	0–100%
97	Strobe 9		000 ⇔ 255	see <a href="#">Strobe Chart</a>
98	Red 9	Cyan 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
99	Fine red 9	Fine cyan 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
100	Green 9	Magenta 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
101	Fine green 9	Fine magenta 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
102	Blue 9	Yellow 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
103	Fine blue 9	Fine yellow 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
104	White 9		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
105	Fine white 9		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
106	Dimmer 10		000 ⇔ 255	0–100%
107	Fine dimmer 10		000 ⇔ 255	0–100%
108	Strobe 10		000 ⇔ 255	see <a href="#">Strobe Chart</a>
109	Red 10	Cyan 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
110	Fine red 10	Fine cyan 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
111	Green 10	Magenta 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
112	Fine green 10	Fine magenta 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
113	Blue 10	Yellow 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
114	Fine blue 10	Fine yellow 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
115	White 10		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
116	Fine white 10		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
117	Dimmer 11		000 ⇔ 255	0–100%
118	Fine dimmer 11		000 ⇔ 255	0–100%
119	Strobe 11		000 ⇔ 255	see <a href="#">Strobe Chart</a>
120	Red 11	Cyan 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
121	Fine red 11	Fine cyan 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
122	Green 11	Magenta 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
123	Fine green 11	Fine magenta 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
124	Blue 11	Yellow 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
125	Fine blue 11	Fine yellow 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
126	White 11		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
127	Fine white 11		000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
128	Dimmer 12		000 ⇔ 255	0–100%
129	Fine dimmer 12		000 ⇔ 255	0–100%
130	Strobe 12		000 ⇔ 255	see <a href="#">Strobe Chart</a>
131	Red 12	Cyan 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
132	Fine red 12	Fine cyan 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
133	Green 12	Magenta 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
134	Fine green 12	Fine magenta 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
135	Blue 12	Yellow 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
136	Fine blue 12	Fine yellow 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

Channel	Function	Value	Percent/Setting
137	White 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
138	Fine white 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
139	Dimmer 13	000 ⇔ 255	0–100%
140	Fine dimmer 13	000 ⇔ 255	0–100%
141	Strobe 13	000 ⇔ 255	see <a href="#">Strobe Chart</a>
142	Red 13      Cyan 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
143	Fine red 13      Fine cyan 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
144	Green 13      Magenta 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
145	Fine green 13      Fine magenta 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
146	Blue 13      Yellow 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
147	Fine blue 13      Fine yellow 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
148	White 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
149	Fine white 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
150	Dimmer 14	000 ⇔ 255	0–100%
151	Fine dimmer 14	000 ⇔ 255	0–100%
152	Strobe 14	000 ⇔ 255	see <a href="#">Strobe Chart</a>
153	Red 14      Cyan 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
154	Fine red 14      Fine cyan 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
155	Green 14      Magenta 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
156	Fine green 14      Fine magenta 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
157	Blue 14      Yellow 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
158	Fine blue 14      Fine yellow 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
159	White 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
160	Fine white 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
161	Dimmer 15	000 ⇔ 255	0–100%
162	Fine dimmer 15	000 ⇔ 255	0–100%
163	Strobe 15	000 ⇔ 255	see <a href="#">Strobe Chart</a>
164	Red 15      Cyan 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
165	Fine red 15      Fine cyan 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
166	Green 15      Magenta 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
167	Fine green 15      Fine magenta 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
168	Blue 15      Yellow 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
169	Fine blue 15      Fine yellow 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
170	White 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
171	Fine white 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
172	Dimmer 16	000 ⇔ 255	0–100%
173	Fine dimmer 16	000 ⇔ 255	0–100%
174	Strobe 16	000 ⇔ 255	see <a href="#">Strobe Chart</a>
175	Red 16      Cyan 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
176	Fine red 16      Fine cyan 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
177	Green 16      Magenta 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
178	Fine green 16      Fine magenta 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
179	Blue 16      Yellow 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
180	Fine blue 16      Fine yellow 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
181	White 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
182	Fine white 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

## Dual Control Movement

### Basic2 (7CH)

Channel	Function	Value	Percent/Setting
1	Tilt	000 ⇔ 255	0–100%
2	Fine tilt	000 ⇔ 255	0–100%
3	Tilt speed	000 ⇔ 255	0–100%
4	Dimmer	000 ⇔ 255	0–100%
5	Strobe	000 ⇔ 255	see <a href="#">Strobe Chart</a>
6	Zoom	000 ⇔ 255	Zoom in to zoom out
7	Control	000 ⇔ 255	see <a href="#">Control Chart</a>



The “Dual Control Movement: Basic2” personality of the COLORado PXL Bar 16 exactly matches the “Dual Control Movement: Basic” personality of the COLORado PXL Bar 8.

### Advanced (26CH) / Standard (20CH) / Basic (8CH)

8 CH	20 CH	26 CH	Function	Value	Percent/Setting
1	1	1	Tilt	000 ⇔ 255	0–100%
2	2	2	Fine tilt	000 ⇔ 255	0–100%
3	3	3	Tilt speed	000 ⇔ 255	0–100%
–	4	4	CTC	000 001 ⇔ 255	No function Color temperature, 1900–2700 K
–	5	5	Color	000 ⇔ 255	see <a href="#">Color Chart</a>
–	6	6	Patterns (see <a href="#">Patterns</a> )	000 001 ⇔ 255	No function Pattern 1–255
–	7	7	LED macro	000 ⇔ 255	see <a href="#">LED Macro Chart</a>
–	8	8	LED macro speed	000 ⇔ 127 128 129 ⇔ 255	Auto speed, fast to slow clockwise Stop Auto speed, slow to fast counterclockwise
–	9	9	LED macro delay	000 ⇔ 255	Fast to slow
–	10	10	Background color	000 ⇔ 255	see <a href="#">Color Chart</a>
–	11	11	Background color dimmer	000 ⇔ 255	0–100%
–	–	12	Background color fine dimmer	000 ⇔ 255	0–100%
4	12	13	Dimmer	000 ⇔ 255	0–100%
–	–	14	Fine dimmer	000 ⇔ 255	0–100%
5	13	15	Strobe	000 ⇔ 255	see <a href="#">Strobe Chart</a>
6	14	16	Zoom 1 (see <a href="#">Zoom Zones</a> )	000 ⇔ 255	Zoom in to zoom out (Zone 1)
7	15	17	Zoom 2 (see <a href="#">Zoom Zones</a> )	000 ⇔ 255	Zoom in to zoom out (Zone 2)
8	16	18	Control	000 ⇔ 255	see <a href="#">Control Chart</a>
–	17	19	Red	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	20	Fine red	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	18	21	Green	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	22	Fine green	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	19	23	Blue	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	24	Fine blue	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	20	25	White	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	26	Fine white	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

## Dual Control Pixels

Advanced (128CH) / Standard (64CH) / Basic (48CH)

48 CH	64 CH	128 CH	Function	Value	Percent/Setting
1	1	1	Red 1      Cyan 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	2	Fine red 1      Fine cyan 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
2	2	3	Green 1      Magenta 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	4	Fine green 1      Fine magenta 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
3	3	5	Blue 1      Yellow 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	6	Fine blue 1      Fine yellow 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	4	7	White 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	8	Fine white 1	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
4	5	9	Red 2      Cyan 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	10	Fine red 2      Fine cyan 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
5	6	11	Green 2      Magenta 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	12	Fine green 2      Fine magenta 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
6	7	13	Blue 2      Yellow 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	14	Fine blue 2      Fine yellow 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	8	15	White 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	16	Fine white 2	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
7	9	17	Red 3      Cyan 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	18	Fine red 3      Fine cyan 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
8	10	19	Green 3      Magenta 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	20	Fine green 3      Fine magenta 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
9	11	21	Blue 3      Yellow 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	22	Fine blue 3      Fine yellow 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	12	23	White 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	24	Fine white 3	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
10	13	25	Red 4      Cyan 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	26	Fine red 4      Fine cyan 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
11	14	27	Green 4      Magenta 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	28	Fine green 4      Fine magenta 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
12	15	29	Blue 4      Yellow 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	30	Fine blue 4      Fine yellow 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	16	31	White 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	32	Fine white 4	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
13	17	33	Red 5      Cyan 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	34	Fine red 5      Fine cyan 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
14	18	35	Green 5      Magenta 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	36	Fine green 5      Fine magenta 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
15	19	37	Blue 5      Yellow 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	38	Fine blue 5      Fine yellow 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	20	39	White 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	40	Fine white 5	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
16	21	41	Red 6      Cyan 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	42	Fine red 6      Fine cyan 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
17	22	43	Green 6      Magenta 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	44	Fine green 6      Fine magenta 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
18	23	45	Blue 6      Yellow 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	46	Fine blue 6      Fine yellow 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	24	47	White 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	48	Fine white 6	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
19	25	49	Red 7      Cyan 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	50	Fine red 7      Fine cyan 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

48 CH	64 CH	128 CH	Function	Value	Percent/Setting
20	26	51	Green 7      Magenta 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	52	Fine green 7      Fine magenta 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
21	27	53	Blue 7      Yellow 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	54	Fine blue 7      Fine yellow 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	28	55	White 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	56	Fine white 7	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
22	29	57	Red 8      Cyan 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	58	Fine red 8      Fine cyan 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
23	30	59	Green 8      Magenta 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	60	Fine green 8      Fine magenta 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
24	31	61	Blue 8      Yellow 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	62	Fine blue 8      Fine yellow 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	32	63	White 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	64	Fine white 8	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
25	33	65	Red 9      Cyan 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	66	Fine red 9      Fine cyan 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
26	34	67	Green 9      Magenta 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	68	Fine green 9      Fine magenta 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
27	35	69	Blue 9      Yellow 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	70	Fine blue 9      Fine yellow 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	36	71	White 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	72	Fine white 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
28	37	73	Red 10      Cyan 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	74	Fine red 10      Fine cyan 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
29	38	75	Green 10      Magenta 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	76	Fine green 10      Fine magenta 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
30	39	77	Blue 10      Yellow 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	78	Fine blue 10      Fine yellow 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	40	79	White 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	80	Fine white 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
31	41	81	Red 11      Cyan 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	82	Fine red 11      Fine cyan 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
32	42	83	Green 11      Magenta 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	84	Fine green 11      Fine magenta 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
33	43	85	Blue 11      Yellow 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	86	Fine blue 11      Fine yellow 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	44	87	White 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	88	Fine white 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
34	45	89	Red 12      Cyan 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	90	Fine red 12      Fine cyan 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
35	46	91	Green 12      Magenta 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	92	Fine green 12      Fine magenta 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
36	47	93	Blue 12      Yellow 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	94	Fine blue 12      Fine yellow 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	48	95	White 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	96	Fine white 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
37	49	97	Red 13      Cyan 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	98	Fine red 13      Fine cyan 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
38	50	99	Green 13      Magenta 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

48 CH	64 CH	128 CH	Function	Value	Percent/Setting
–	–	100	Fine green 13      Fine magenta 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
39	51	101	Blue 13      Yellow 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	102	Fine blue 13      Fine yellow 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	52	103	White 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	104	Fine white 13	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
40	53	105	Red 14      Cyan 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	106	Fine red 14      Fine cyan 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
41	54	107	Green 14      Magenta 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	108	Fine green 14      Fine magenta 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
42	55	109	Blue 14      Yellow 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	110	Fine blue 14      Fine yellow 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	56	111	White 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	112	Fine white 14	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
43	57	113	Red 15      Cyan 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	114	Fine red 15      Fine cyan 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
44	58	115	Green 15      Magenta 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	116	Fine green 15      Fine magenta 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
45	59	117	Blue 15      Yellow 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	118	Fine blue 15      Fine yellow 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	60	119	White 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	120	Fine white 15	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
46	61	121	Red 16      Cyan 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	122	Fine red 16      Fine cyan 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
47	62	123	Green 16      Magenta 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	124	Fine green 16      Fine magenta 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
48	63	125	Blue 16      Yellow 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	126	Fine blue 16      Fine yellow 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	64	127	White 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	128	Fine white 16	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%



## Color Chart

Value	Percent/Setting				
000	No function				
001 ⇔ 002	White 2700K	R = 156	G = 118	B = 0	W = 63
003 ⇔ 004	White 3200K	R = 156	G = 141	B = 5	W = 89
005 ⇔ 006	White 4200K	R = 156	G = 141	B = 14	W = 255
007 ⇔ 008	White 5600K	R = 156	G = 207	B = 54	W = 255
009 ⇔ 010	White 8000K	R = 130	G = 255	B = 96	W = 255
011	Blue	R = 0	G = 0	B = 255	W = 0
012 ⇔ 048	+ Green	R = 0	G = 0–255	B = 255	W = 0
049	Cyan	R = 0	G = 255	B = 255	W = 0
050 ⇔ 086	- Blue	R = 0	G = 255	B = 255–0	W = 0
087	Green	R = 0	G = 255	B = 0	W = 0
088 ⇔ 124	+ Red	R = 0–255	G = 255	B = 0	W = 0
125	Yellow	R = 255	G = 255	B = 0	W = 0
126 ⇔ 162	- Green	R = 255	G = 255–0	B = 0	W = 0
163	Red	R = 255	G = 0	B = 0	W = 0
164 ⇔ 200	+ Blue	R = 255	G = 0	B = 0–255	W = 0
201	Magenta	R = 255	G = 0	B = 255	W = 0
202 ⇔ 238	- Red	R = 255–0	G = 0	B = 255	W = 0
239	Blue	R = 0	G = 0	B = 255	W = 0
240 ⇔ 247	Color fade, fast to slow				
248 ⇔ 255	Color snap, fast to slow				

## Strobe Chart

Value	Percent/Setting	Value	Percent/Setting
000 ⇔ 019	Off	145 ⇔ 149	On
020 ⇔ 024	On	150 ⇔ 164	Random strobe 0–100%, fast to slow
025 ⇔ 064	Strobe, fast to slow	165 ⇔ 169	On
065 ⇔ 069	On	170 ⇔ 184	Pulse strobe, fast to slow
070 ⇔ 084	Strobe 100–0%, fast to slow	185 ⇔ 189	On
085 ⇔ 089	On	190 ⇔ 204	Random pulse strobe, fast to slow
090 ⇔ 104	Strobe 0–100%, fast to slow	205 ⇔ 209	On
105 ⇔ 109	On	210 ⇔ 224	Strobe 0–100–0%, fast to slow
110 ⇔ 124	Random strobe, fast to slow	225 ⇔ 229	On
125 ⇔ 129	On	230 ⇔ 244	Random pulse strobe, fast to slow
130 ⇔ 144	Random strobe 100–0%, fast to slow	245 ⇔ 255	On

## Control Chart


Value	Percent/Setting	Value	Percent/Setting
000 ⇔ 009	No function	082 ⇔ 084	Cell order 1–16
010 ⇔ 014	Blackout on tilt	085 ⇔ 089	Cell order 16–1
015 ⇔ 019	Reserved for future use	090 ⇔ 094	Tilt reverse
020 ⇔ 024	RGBW (additive) color-mixing mode	095 ⇔ 099	Reserved for future use
025 ⇔ 029	CMY (subtractive) color-mixing mode	100 ⇔ 104	Tilt reverse disable
030 ⇔ 034	Single zoom off	105 ⇔ 119	Reserved for future use
035 ⇔ 039	Single zoom on	120 ⇔ 124	Fan ECO
040 ⇔ 044	Defrost fan on	125 ⇔ 129	Fan full
045 ⇔ 049	Defrost fan off	130 ⇔ 134	Fan auto
050 ⇔ 054	Reserved for future use	135 ⇔ 139	Dimmer fast
055 ⇔ 059	Tilt reset	140 ⇔ 144	Dimmer smooth
060 ⇔ 064	Zoom reset	145 ⇔ 149	Linear
065 ⇔ 069	Reserved for future use	150 ⇔ 154	Square
070 ⇔ 074	Reset all	155 ⇔ 159	i Squa
075	PWM 600HZ	160 ⇔ 164	SCurve
076	PWM 1200HZ	165 ⇔ 169	White mode
077	PWM 2000 HZ	170 ⇔ 174	Full mode
078	PWM 4000 HZ	175 ⇔ 239	Color Macros HTP on
079	PWM 6000 HZ	240 ⇔ 247	Color Macros HTP off
080	PWM 15000 HZ	248 ⇔ 255	Reserved for future use
081	Reserved for future use		



## LED Macro Chart

Value	Percent/Setting	Value	Percent/Setting
000 ⇔ 015	No function	136 ⇔ 137	Auto color macro 38
016 ⇔ 017	Color-controllable macro 1	138 ⇔ 139	Auto color macro 39
018 ⇔ 019	Color-controllable macro 2	140 ⇔ 141	Auto color macro 40
020 ⇔ 021	Color-controllable macro 3	142 ⇔ 143	Auto color macro 41
022 ⇔ 023	Color-controllable macro 4	144 ⇔ 145	Auto color macro 42
024 ⇔ 025	Color-controllable macro 5	146 ⇔ 147	Auto color macro 43
026 ⇔ 027	Color-controllable macro 6	148 ⇔ 149	Auto color macro 44
028 ⇔ 029	Color-controllable macro 7	150 ⇔ 151	Auto color macro 45
030 ⇔ 031	Color-controllable macro 8	152 ⇔ 153	Auto color macro 46
032 ⇔ 033	Color-controllable macro 9	154 ⇔ 155	Auto color macro 47
034 ⇔ 035	Color-controllable macro 10	156 ⇔ 157	Auto color macro 48
036 ⇔ 037	Color-controllable macro 11	158 ⇔ 159	Auto color macro 49
038 ⇔ 039	Color-controllable macro 12	160 ⇔ 161	Auto color macro 50
040 ⇔ 041	Color-controllable macro 13	162 ⇔ 163	Auto color macro 51
042 ⇔ 043	Color-controllable macro 14	164 ⇔ 165	Auto color macro 52
044 ⇔ 045	Color-controllable macro 15	166 ⇔ 167	Auto color macro 53
046 ⇔ 047	Color-controllable macro 16	168 ⇔ 169	Auto color macro 54
048 ⇔ 049	Color-controllable macro 17	170 ⇔ 171	Auto color macro 55
050 ⇔ 051	Color-controllable macro 18	172 ⇔ 173	Auto color macro 56
052 ⇔ 053	Color-controllable macro 19	174 ⇔ 175	Auto color macro 57
054 ⇔ 055	Color-controllable macro 20	176 ⇔ 177	Auto color macro 58
056 ⇔ 057	Color-controllable macro 21	178 ⇔ 179	Auto color macro 59
058 ⇔ 059	Color-controllable macro 22	180 ⇔ 181	Auto color macro 60
060 ⇔ 061	Color-controllable macro 23	182 ⇔ 183	Auto color macro 61
062 ⇔ 063	Color-controllable macro 24	184 ⇔ 185	Auto color macro 62
064 ⇔ 065	Color-controllable macro 25	186 ⇔ 187	Auto color macro 63
066 ⇔ 067	Color-controllable macro 26	188 ⇔ 189	Auto color macro 64
068 ⇔ 069	Color-controllable macro 27	190 ⇔ 191	Auto color macro 65
070 ⇔ 071	Color-controllable macro 28	192 ⇔ 193	Auto color macro 66
072 ⇔ 073	Color-controllable macro 29	194 ⇔ 195	Auto color macro 67
074 ⇔ 075	Color-controllable macro 30	196 ⇔ 197	Auto color macro 68
076 ⇔ 077	Color-controllable macro 31	198 ⇔ 199	Auto color macro 69
078 ⇔ 079	Color-controllable macro 32	200 ⇔ 201	Auto color macro 70
080 ⇔ 081	Color-controllable macro 33	202 ⇔ 203	Auto color macro 71
082 ⇔ 083	Color-controllable macro 34	204 ⇔ 205	Auto color macro 72
084 ⇔ 085	Color-controllable macro 35	206 ⇔ 207	Auto color macro 73
086 ⇔ 087	Color-controllable macro 36	208 ⇔ 255	Auto color macro 74 (main macro)
088 ⇔ 135	Color-controllable macro 37 (main macro)		

## Zoom Zones

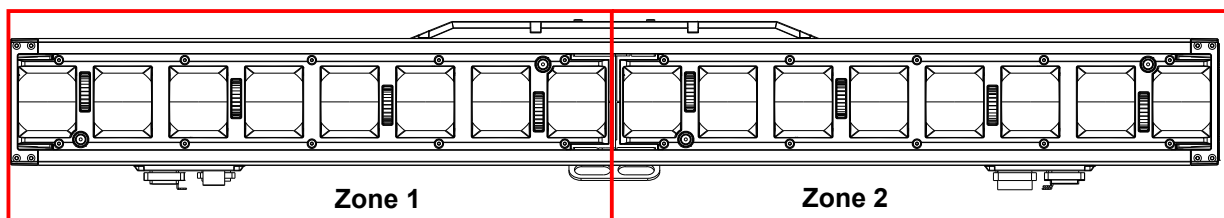

[illegible]

## Standalone Configuration

### Test Mode

#### Auto Test

To perform an auto test of the COLORado PXL Bar 16, follow the instructions below:

1. Go to the **Run Mode** main level.
2. Select **Auto Test**.

#### Manual Test

To test the functions of the COLORado PXL Bar 16 manually, do the following:

1. Go to the **Run Mode** main level.
2. Select **Manual Test**.
3. Select the function (**Tilt**, **P/T Speed**, **Red**, **Green**, **Blue**, **White**, **CTC**, **Color**, **Pattern**, **LED Macro**, **LED Ma. Speed**, **LED Ma. Fade**, **Background**, **Background Dim.**, **Dimmer**, **Shutter**, **Function**, **Zoom1**, and **Zoom2**) to test.
4. Change the value of the tested function, **000–255**.

### Setup

#### Network Settings

To adjust the IP Mode, IP Byte, and SubMask settings, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Network Settings**.

#### IP mode

The IP address of the COLORado PXL Bar 16 can be set manually, by the network, or to a preset static address specific to each product. To set the IP Mode, do the following:

1. Navigate to **Network Settings**.
2. Select **IP Mode**.
3. Select among:
  - **Manual** – set the IP address with the control panel
  - **DHCP** – the network sets the IP address
  - **Static** – a preset address specific to each product

#### IP byte

In Manual IP Mode, the IP address must be assigned using the product menu. To set the IP address in Manual IP Mode, follow the instructions below:

1. Navigate to **Network Settings**.
2. Select **IP**.
3. Select from **IP Byte 1 to 4**.
4. Change the value of each IP Byte, **000–255**.

#### Subnet mask

In Manual IP Mode, the Subnet Mask must be assigned using the product menu. To set the Subnet Mask in Manual IP mode, do the following:

1. Navigate to **Network Settings**.
2. Select **SMK**.
3. Select from **SubMask 1 to 4**.
4. Change the value of each SubMask, **000–255**.

#### Tilt Orientation

To set whether the tilt orientation is normal or inverted, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Tilt Reverse**.
3. Select **NO** (normal tilt) or **YES** (reversed tilt).

#### Zoom Orientation

To set whether the zoom goes from wide to narrow or from narrow to wide, do the following:

1. Go to the **Setup** main level.
2. Select **Zoom Reverse**.
3. Select **NO** (wide to narrow) or **YES** (narrow to wide).

### Display Orientation

To set which way the display faces, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Screen Reverse**.
3. Select **NO** (display is normal), **YES** (display is inverted), or **AUTO** (the display automatically detects which way the product is facing and orients itself accordingly).

### Tilt Angle Range

To set the range of motion the tilt is permitted, do the following:

1. Go to the **Setup** main level.
2. Select **Tilt Angle**.
3. Select **200** (200° tilt), **180** (180° tilt), or **60** (60° tilt).

### Blackout on Tilt Movement

To set whether the product will black out during tilt movement, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **BL. O. T Move**.
3. Select **NO** (do not black out) or **YES** (black out during movement).

### Backlight Timer

To set the amount of time after inactivity before the display backlight turns off, do the following:

1. Go to the **Setup** main level.
2. Select **Backlight Timer**.
3. Select **30S** (after 30 seconds of inactivity), **1M** (after 1 minute of inactivity), **5M** (after 5 minutes of inactivity), or **ON** (does not turn off).

### Loss of Data

In case of any loss of input signal, the COLORado PXL Bar 16 will respond in one of two ways: The product will either hold the last signal received, or black out all LED output.

To set how the product responds, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Loss of Data**.
3. Select **Hold** (hold last signal received) or **Close** (black out all LED output).

### Fan Speed

To set the speed of the fans, do the following:

1. Go to the **Setup** main level.
2. Select **Fans**.
3. Select **Auto** (fan speed set according to product temperature), **Full** (maximum speed), or **ECO** (quiet fan mode).

### Defrost Fan

To activate or deactivate the defrost fan, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Defrost Fan**.
3. Select **OFF** (deactivate defrost fan) or **ON** (activate defrost fan).

### Color-Mixing Mode

The COLORado PXL Bar 16 has a mode that emulates CMY (cyan, magenta, and yellow) color mixing. In this mode, the dimming is reversed (000 = 100%, 255 = 0%), and the red, green, and blue channels control cyan, magenta, and yellow, respectively.

To set the color-mixing mode, do the following:

1. Go to the **Setup** main level.
2. Select **C Mixing Mode**.
3. Select **RGBW** (additive mode: 0–100%) or **CMY** (subtractive mode: 100–0%).

### Dimmer Curve

To set the dimmer curve, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Dimmer Curve**.
3. Select **Linear** (increase in light intensity is linear), **Square** (light intensity control is finer at low levels and coarser at high levels), **LSqua** (light intensity control is coarser at low levels and finer at high levels), or **SCurve** (light intensity is finer at low and high levels, and coarser at medium levels).

## Operation

### Dimmer Speed

To set the dimmer speed, do the following:

1. Go to the **Setup** main level.
2. Select **Dimmer Speed**.
3. Select **Smooth** or **Fast**.

### LED Frequency

This option changes the Pulse Width Modulation (PWM) frequency of the LEDs on the COLORado PXL Bar 16.

1. Go to the **Setup** main level.
2. Go to the **PWM Option** main level.
3. Select PWM frequency (**600Hz**, **1200Hz**, **2000Hz**, **4000Hz**, **6000Hz**, or **25Khz**).

### Cell Order

To set how the light is activated, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Cell Order**.
3. Choose **1–16** (light activates from left to right) or **16–1** (light activates from right to left).

### Calibrated White

When activated, calibrated white sets the light output temperature to 7500K. To set the calibrated white setting, do the following:

1. Go to the **Setup** main level.
2. Select **Calibrated White**.
3. Select **ON** (activates calibrated white), **OFF** (deactivates calibrated white), or **Custom** (adjust light output temperature using the White Balance setting).

### White Balance

To set the maximum values of a given LED color to create a white light output, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **White Balance**.
3. Select the color value to be changed (**Red**, **Green**, **Blue**, or **White**).
4. Set the color value, **000–255**.

### Preset Functions

The COLORado PXL Bar 16 has three presets. Every time a settings is changed in the fixture, the current preset is updated to include that change. To load a preset, do the following:

1. Go to the **Setup** main level.
2. Select **Preset Select**.
3. Select the preset to load (**PRESET A**, **PRESET B**, or **PRESET C**).
4. The selected preset will load, and all changes made to the settings will save to that preset.

Presets can be uploaded to other COLORado PXL Bar 16 using a DMX connection. To do so:

1. Connect the DMX Out of the product that has the desired presets to the DMX In of the product to be updated.
2. Power on both products.
3. On the product with the desired presets, go to the **Setup** main level.
4. Select **Preset Sync**.
5. Select **NO** (do not upload settings) or **YES** (upload settings).

### Reset Functions

To reset the tilt, zoom, or all functions as if from startup, follow the instructions below:

1. Go to the **Setup** main level.
2. Select **Reset Function**.
3. Select the function to be reset (**Tilt**, **Zoom**, or **All**).
4. Select **NO** (do not reset) or **YES** (reset).

### Factory Reset

To restore the COLORado PXL Bar 16 to factory default settings, do the following:

1. Go to the **Setup** main level.
2. Select **Factory Settings**.
3. Select **NO** (do not reset) or **YES** (reset to factory default settings).

## System Information

All the information about the current status of the COLORado PXL Bar 16 is available through the product's **Information** menu. To view this information, follow the instructions below:

1. Go to the **Information** main level.
2. Choose the desired information from the following:
  - **Firmware Version** – displays the current firmware version
  - **Running Mode** – displays the current running mode
  - **Address** – displays the current starting address
  - **Temperature** – displays the current product temperature in °C
  - **Fixture Time** – displays the number of hours the fixture has been powered on
  - **LED Hours** – displays the total hours the LED has been powered on
  - **ArtNet Info** – displays the current IP address, Subnet Mask, and MAC address
  - **Device UID** – displays the product UID
  - **Fan Information** – displays the speed of head fans, defrost fans, and base fans

## Offset Mode

The offset mode provides fine adjustments for the home position of all the moving parts in the optical path and the tilt movements. This ensures that the moving parts do not show any border or reduce the light output when in their home position.

1. Starting from the Main Level screen, press and hold **<MENU>** until the passcode screen appears.
2. Enter the passcode **2323**.
3. This directs the user to the Zero Adjust menu screen.

### Tilt

To adjust the starting point of the tilt motor, do the following:

1. Select **TILT**.
2. Increase or decrease the starting value, from **000** to **255**.

### Zoom

To adjust the starting point of the zoom motor, follow the instructions below:

1. Select **ZOOM1** or **ZOOM2**.
2. Increase or decrease the starting value, from **000** to **255**.

### MAC Address

To adjust the fourth, fifth, and sixth digit of the MAC address, do the following:

1. Select **MAC4**, **MAC5**, or **MAC6**.
2. Increase or decrease the starting value, from **000** to **255**.

### Web Server

The COLORado PXL Bar 16 Web Server can be accessed by any computer on the same network as the product. It allows network access to system information and settings (e.g., control setup, manual testing of all functions, firmware updates, and the ability to change the Web Server password).

1. Connect the product to power, and set the Control Protocol to **Art-Net** and the [IP mode](#) to **Static**.
2. Connect the product to a Windows® computer with a network cable.
3. On the computer, set the IP address of the new network to have the same first 3 digits as the IP address of the product (see [IP byte](#)).
4. Enter the IP address of the product into the URL bar of a Web browser on the computer.
5. Enter both the User Name and Password as **admin** to log in.

### Information

The Information page on the Web Server displays the current settings and the system information of the COLORado PXL Bar 16.

### Setup

The Setup page on the Web Server provides options for control, similar to the **Setup** menu on the product. Click **Save Settings** to send the new configuration to the product.

### Manual Test

The Manual Test page on the Web Server allows all output functions of the product to be controlled through the browser. To set all functions back to default, click **Reset**.

### Firmware Update

The Upgrade page on the Web Server allows the product to be updated with the latest firmware. Go to <https://www.chauvetprofessional.com/products/colorado-pxl-bar-16> to download firmware updates.

### Security

The Security page on the Web Server gives the option to change the password to the connected product's Web server. Enter the old password (**admin**, by default) and the new password twice, then click **Save Settings** to change the password.

## Error Codes

See the table below for error codes and recommended solutions:

Error Code	Possible Reason	Potential Solution
<b>Base Fan1</b>	Base fan 1 error	Check fan connection
		Replace fan
<b>Base Fan2</b>	Base fan 2 error	Check fan connection
		Replace fan
<b>CPU-B</b>	LED CPU error	Check PCB connection
		Replace PCB
<b>CPU-C</b>	LED CPU error	Check PCB connection
		Replace PCB
<b>CPU-D</b>	LED CPU error	Check PCB connection
		Replace PCB
<b>CPU-E</b>	LED CPU error	Check PCB connection
		Replace PCB
<b>CPU-F</b>	Pan/tilt CPU error	Check PCB connection
		Replace PCB
<b>FAN1–10</b>	Fan 1–10 error	Check fan connection
		Replace fan
<b>LED HOT</b>	LED overheated	Do a factory reset
		Update software
		Check connection of the head to the base
		Replace PCB
<b>Thermistor Open</b>	Bad or missing thermistor	Do a factory reset
		Update software
		Check connection of the head to the base
		Replace thermistor
<b>Thermistor Short</b>	Bad thermistor	Do a factory reset
		Update software
		Check connection of the head to the base
		Replace thermistor
<b>Y_op</b>	Tilt optocoupler error	Factory reset
		Update reset
		Check connection of the head to the base
		Replace sensor
		Replace motor



## 5. Maintenance

### Product Maintenance

To maintain optimum performance and minimize wear, clean this product frequently. Usage and environment are contributing factors in determining the cleaning frequency.

Clean this product at least twice a month. Dust build-up reduces light output performance and can cause overheating. This can lead to reduced light source life and increased mechanical wear.

To clean the product:

1. Unplug the product from power.
2. Wait until the product is at room temperature.
3. Use a vacuum (or dry compressed air) and a soft brush to remove dust collected on the external vents.
4. Clean all transparent surfaces with a mild soap solution, ammonia-free glass cleaner, or isopropyl alcohol.
5. Apply the solution directly to a soft, lint free cotton cloth or a lens cleaning tissue.
6. Softly drag any dirt or grime to the outside of the transparent surface.
7. Gently polish the transparent surfaces until they are free of haze and lint.



**Always dry the transparent surfaces carefully after cleaning them.**



**Avoid spinning the cooling fans using compressed air to prevent damage.**

### Torque Measurements

To maintain the IP rating when reassembling the product, use the given torque measurements for each of the following screws and bolts:

Fixture Parts	Torque Rating (Kgf.cm)	Torque Rating (lbf.in)
Omega bracket holder	12.2	10.6
Connector plate Allen Key screws	16.3	14.2
Screws around power and data ports	3.6	3.1
Front display bump out Allen screws	15.3	13.3
Display	9.2	7.9
Arm covers	10.2	8.9
Top lens cover (corners)	11.2	9.7
Head covers	25.5	22.1

### Vacuum Test Measurements

Use the IP Tester from Chauvet Professional to ensure the product has been reassembled correctly by following the information below:

Parameters	Values
Method	Positive
Test pressure	15 kPa
Test duration	60 seconds
PASS state leak pressure	<0.1 kPa

## 6. Technical Specifications

### Dimensions and Weight

Length	Width	Height	Weight
39.37 in (1,000 mm)	5.47 in (139 mm)	10.75 in (273 mm)	45.6 lb (20.7 kg)

**Note:** Dimensions in inches rounded to the nearest decimal digit.

### Power

Power Supply Type	Range		Voltage Selection		
Switching (internal)	100 to 240 VAC, 50/60 Hz		Auto-ranging		
Parameter	100 V, 60 Hz	120 V, 60 Hz	208 V, 60 Hz	230 V, 50 Hz	240 V, 50 Hz
Consumption	835 W	790 W	771 W	768 W	840 W
Operating current	8.35 A	6.60 A	3.821 A	3.485 A	3.50 A
Fuse/Breaker	F 12 A, 250 V	F 12 A, 250 V	F 12 A, 250 V	F 12 A, 250 V	F 12 A, 250 V
Power-linking current (products)	12 A (0 products)	12 A (0 products)	12 A (3 products)	12 A (3 products)	12 A (3 products)
Power I/O	U.S./Worldwide		UK/Europe		
Power input connector	Seetronic Powerkon IP65		Seetronic Powerkon IP65		
Power output connector	Seetronic Powerkon IP65		Seetronic Powerkon IP65		
Power cord plug	Bare end (U.S.)		Bare end		

### Light Source

Type	Color	Quantity	Power	Current	Lifespan
LED	Quad-color RGBW	16	45 W	3.0 A	50,000 hours

### Photometrics

Parameter	Total Value	Single Cell Value
Beam angle	5.8° to 30.4°	4° to 29.9°
Field angle	8.9° to 42.2°	5.4° to 42.3°
Cutoff angle	10° to 47.9°	6.1° to 45.5°
Zoom range	5.8° to 47.9°	4° to 45.5°
Illuminance (5.7°)	27,415 lux @ 5m	
Illuminance (43.3°)	1,294 lux @ 5m	
Lumens (43.3°)	8,959	
CRI	61.6	

### Thermal

Maximum External Temperature	Cooling System
113 °F (45 °C)	Fan-assisted convection

### DMX

I/O Connector	Channel Range
5-pin IP-rated XLR	<b>Single Mode:</b> 19, 20, 84, 154, 182, or 186 channels <b>Dual Mode Movement:</b> 7, 8, 20, or 26 channels <b>Dual Mode LED:</b> 48, 64, or 128 channels

### Ordering

Product Name	Item Name	Item Code	UPC Number
COLORado PXL Bar 16	COLORADOPXLBAR16	08011855	781462222031



UL 1573  
CSA C22.2 No. 166  
E113093



## Contact Us

General Information	Technical Support
<b>Chauvet World Headquarters</b>	
Address: 3360 Davie Rd., Suite 509 Davie, FL 33314 Voice: (954) 577-4455 Fax: (954) 929-5560 Toll Free: (800) 762-1084	Voice: (844) 393-7575 Fax: (954) 756-8015 Email: <a href="mailto:chauvetcs@chauvetlighting.com">chauvetcs@chauvetlighting.com</a> Website: <a href="http://www.chauvetprofessional.com">www.chauvetprofessional.com</a>
<b>Chauvet U.K.</b>	
Address: Pod 1 EVO Park Little Oak Drive, Sherwood Park Nottinghamshire, NG15 0EB UK Voice: +44 (0) 1773 511115 Fax: +44 (0) 1773 511110	Email: <a href="mailto:UKtech@chauvetlighting.eu">UKtech@chauvetlighting.eu</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Benelux</b>	
Address: Vaartlaan 9 9800 Deinze Belgium Voice: +32 9 388 93 97	Email: <a href="mailto:BNLtech@chauvetlighting.eu">BNLtech@chauvetlighting.eu</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet France</b>	
Address: 3, Rue Ampère 91380 Chilly-Mazarin France Voice: +33 1 78 85 33 59	Email: <a href="mailto:FRtech@chauvetlighting.fr">FRtech@chauvetlighting.fr</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Germany</b>	
Address: Bruno-Bürgel-Str. 11 28759 Bremen Germany Voice: +49 421 62 60 20	Email: <a href="mailto:DEtech@chauvetlighting.de">DEtech@chauvetlighting.de</a> Website: <a href="http://www.chauvetprofessional.eu">www.chauvetprofessional.eu</a>
<b>Chauvet Mexico</b>	
Address: Av. de las Partidas 34 - 3B (Entrance by Calle 2) Zona Industrial Lerma Lerma, Edo. de México, CP 52000 Voice: +52 (728) 690-2010	Email: <a href="mailto:servicio@chauvet.com.mx">servicio@chauvet.com.mx</a> Website: <a href="http://www.chauvetprofessional.mx">www.chauvetprofessional.mx</a>

## Warranty & Returns

For warranty terms and conditions and return information, please visit our website.

For customers in the United States and Mexico: [www.chauvetlighting.com/warranty-registration](http://www.chauvetlighting.com/warranty-registration).

For customers in the United Kingdom, Republic of Ireland, Belgium, the Netherlands, Luxembourg, France, and Germany: [www.chauvetlighting.eu/warranty-registration](http://www.chauvetlighting.eu/warranty-registration).