

MAVERICK FORCE

2 BEAMWASH

User Manual



Model ID: MAVERICKFORCE2BEAMWASH

CHAUVENT
PROFESSIONAL

Edition Notes

The Maverick Force 2 BeamWash User Manual includes a description, safety precautions, installation, programming, operation and maintenance instructions for the Maverick Force 2 BeamWash as of the release date of this edition.

Trademarks

Chauvet, Chauvet Professional, the Chauvet logo, Maverick, and Maverick Force are registered trademarks or trademarks of Chauvet & Sons, LLC (d/b/a Chauvet and Chauvet Lighting) in the United States and other countries. Other company and product names and logos referred to herein may be trademarks of their respective companies.

Copyright Notice

The works of authorship contained in this manual, including, but not limited to, all designs, text, and images are owned by Chauvet.

© Copyright 2025 Chauvet & Sons, LLC. All rights reserved.

Electronically published by Chauvet in the United States of America.

Manual Use

Chauvet authorizes its customers to download and print this manual for professional information purposes only. Chauvet expressly prohibits the usage, copy, storage, distribution, modification, or printing of this manual or its content for any other purpose without written consent from Chauvet.

Document Printing

For best results, print this document in color, on letter size paper (8.5 x 11 in), double-sided. If using A4 paper (210 x 297 mm), configure the printer to scale the content accordingly.

Intended Audience

Any person installing, operating, and/or maintaining this product should completely read through the guide that shipped with the product, as well as this manual, before installing, operating, or maintaining this product.

Disclaimer

Chauvet believes that the information contained in this manual is accurate in all respects. However, Chauvet assumes no responsibility and specifically disclaims any and all liability to any party for any loss, damage or disruption caused by any errors or omissions in this document, whether such errors or omissions result from negligence, accident or any other cause. Chauvet reserves the right to revise the content of this document without any obligation to notify any person or company of such revision, however, Chauvet has no obligation to make, and does not commit to make, any such revisions.

Document Revision

Go to www.chauvetprofessional.com for the latest version.

Revision	Date	Description
7	12/2025	Added acoustic technical specifications

Table of Contents

TABLE OF CONTENTS

1. Before You Begin	1
What Is Included	1
Claims	1
Text Conventions	1
Symbols	1
Safety Notes.....	2
FCC Statement of Compliance	3
RF Exposure Warning for North America and Australia.....	3
Expected LED Lifespan.....	3
2. Introduction	4
Description	4
Features	4
Product Overview.....	5
Product Dimensions	6
3. Setup	7
AC Power	7
AC Plug	7
Power Linking.....	7
Fuse Replacement	7
Remote Device Management.....	7
USB Software Update	8
Mounting	9
Orientation.....	9
Rigging	9
Procedure.....	9
Signal Connections	10
Control Personalities	10
DMX Linking	10
Art-Net™ Connection	10
sACN Connection.....	10
Connection Diagram	11
4. Operation	12
Control Panel Description	12
Battery Powered Display.....	12
Home Screen	12
Control Panel Lock.....	12
Passcode	12
Technician Mode.....	13
Menu Map	13
Control Configuration	19
Control Mode.....	19
Control Personalities	19
Starting Address.....	19
Network Setup.....	20
IP Mode.....	20
Universe.....	20

Manual IP Address.....	20
Subnet Mask	20
Control Channel Assignments and Value	20
Pixel Chart	20
Control Channel Assignments and Values.....	21
Single Control Values.....	21
Dual Control Movement Values	27
Dual Control Pixels Values.....	30
Settings Configuration.....	33
Pan Reverse	33
Tilt Reverse	33
Zoom Reverse.....	33
Screen Reverse	33
Pan Angle.....	33
Tilt Angle	33
Black out on Movement.....	33
Calibration	33
Touchscreen Lock.....	33
Lock Screen	33
Swap Pan and Tilt.....	34
WDMX Reset	34
Display Backlight Timer.....	34
Loss of Data	34
Fan speed	34
Color mixing mode	34
Dimmer curve	34
Dimmer speed	34
Pulse Width Modulation	34
Color balance	35
Calibrated White.....	35
White Balance	35
Preset select	35
Preset sync	35
USB Update	35
Reset functions	36
Factory Reset.....	36
Test Mode	36
Auto Test.....	36
Manual Test	36
System Information	36
Zero Adjust Mode.....	36
Web Server	37
5. Maintenance.....	38
Product Maintenance	38
Transporting on Truss or Racks.....	38
6. Technical Specifications	39
Contact Us	40
Warranty & Returns.....	40

Before You Begin

1. Before You Begin

What Is Included

- Maverick Force 2 BeamWash
- Seetronic Powerkon IP65 power cable
- 2 Omega brackets with mounting hardware
- Quick Reference Guide

Claims

Carefully unpack the product immediately and check the container to make sure all the parts are in the package and are in good condition.

If the box or the contents (the product and included accessories) appear damaged from shipping, or show signs of mishandling, notify the carrier immediately, not Chauvet. Failure to report damage to the carrier immediately may invalidate a claim. In addition, keep the box and contents for inspection.

For other issues, such as missing components or parts, damage not related to shipping, or concealed damage, file a claim with Chauvet within 7 days of delivery.

Text Conventions

Convention	Meaning
1–512	A range of values
50/60	A set of values of which only one can be chosen
Settings	A menu option not to be modified
<ENTER>	A key to be pressed on the product's control panel

Symbols

Symbol	Meaning
	Critical installation, configuration, or operation information. Not following these instructions may make the product not work, cause damage to the product, or cause harm to the operator.
	Important installation or configuration information. The product may not function correctly if this information is not used.
	Useful information.

 The term “DMX” used throughout this manual refers to the USITT DMX512-A digital data transmission protocol.

Connection of the control signal: DMX line

- The product has XLR sockets for DMX input and output.
- **Notice:** This control circuit is isolated and belongs to the Class 2 data port.

The control circuit has a cumulative leakage current of less than 3.5 mA.

Safety Notes

Read all the following safety notes before working with this product. These notes contain important information about the installation, usage, and maintenance of this product.



This product contains no user-serviceable parts. Any reference to servicing in this User Manual will only apply to properly trained, certified technicians. Do not open the housing or attempt any repairs.



All applicable local codes and regulations apply to proper installation of this product.

- The luminaire is intended for professional use only.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 16.4 ft (5 m) is not expected.
- If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or its service agent.
- The light source contained in this luminaire shall only be replaced by the manufacturer or its service agent or a similar qualified person.
- **CAUTION:**
 - This product's housing may be hot when operating. Mount this product in a location with adequate ventilation, at least 20 in (50 cm) from adjacent surfaces.
 - When transferring the product from extreme temperature environments, (e.g., cold truck to warm humid ballroom) condensation may form on the internal electronics of the product. To avoid causing a failure, allow the product to fully acclimate to the surrounding environment before connecting it to power.
 - Flashing light is known to trigger epileptic seizures. User must comply with local laws regarding notification of strobe use.
- **ALWAYS:**
 - Disconnect from power before cleaning the product or replacing the fuse.
 - Replace the fuse with the same type and rating.
 - Use a safety cable when mounting this product overhead.
 - Connect this product to a grounded and protected circuit.
- **DO NOT:**
 - Open this product. It contains no user-serviceable parts.
 - Look at the light source when the product is on.
 - Leave any flammable material within 100 cm of this product while operating or connected to power.
 - Connect this product to a dimmer or rheostat.
 - Operate this product if the housing, lenses, or cables appear damaged.
 - Operate this product outdoors or in any location where dust, excessive heat, water, or humidity may affect it (adhere to standards for the published IP rating).
 - ONLY use the carry handles or hanging/mounting bracket to carry this product.
 - The maximum ambient temperature is 113 °F (45 °C). Do not operate this product at higher temperatures.
 - The minimum startup temperature is -4°F (-20°C). Do not start the product at lower temperatures.
 - To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.
 - In the event of a serious operating problem, stop using immediately.



If a Chauvet product requires service, contact Chauvet Technical Support.

Before You Begin

FCC Statement of Compliance

This device complies with Part 15 Part B of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure Warning for North America and Australia

Warning! This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and the user. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Expected LED Lifespan


Over time, use and heat will gradually reduce LED brightness. Clustered LEDs produce more heat than single LEDs, contributing to shorter lifespans if always used at full intensity. The average LED lifespan is 40,000 to 50,000 hours. To extend LED lifespan, maintain proper ventilation around the product, and limit the overall intensity.

2. Introduction

Features

- Fully featured RBGBW LED yoke wash fixture
- Pixel mapping and zoom
- Virtual color wheel with various options
- Built in virtual gobo wheel
- DMX, WDMX, sACN, Art-Net, and Kling-Net
- RDM enabled for remote addressing and trouble shooting
- 3.7 to 50.2 zoom range for variable beam sizes.
- Variable calibrated white with maximum 7500K at full output
- True 1 compatible power input
- USB-C software update port
- Battery backup display with auto rotate
- Three setup menu presets and preset sync



Product Overview

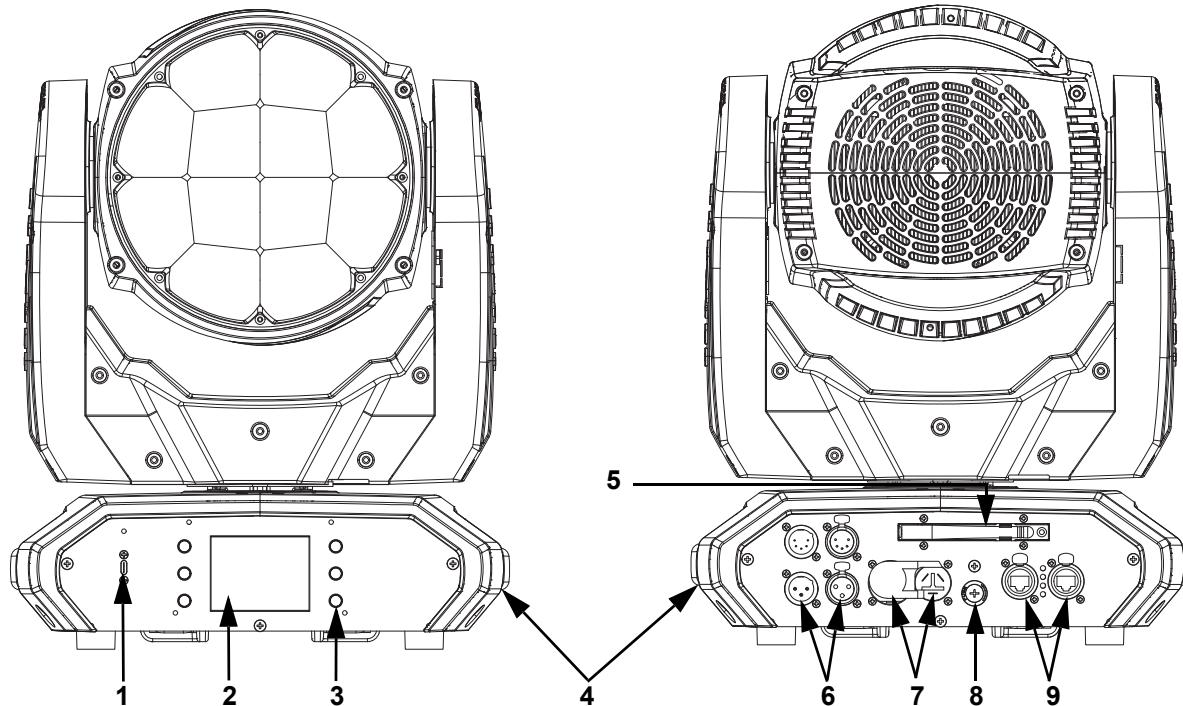

#	Name
1	USB port
2	LCD display
3	Menu buttons
4	Carry handle (x2)
5	WDMX antenna
6	DMX in/out
7	Power in/out
8	Fuse holder
9	Ethernet port

Introduction

Product Dimensions

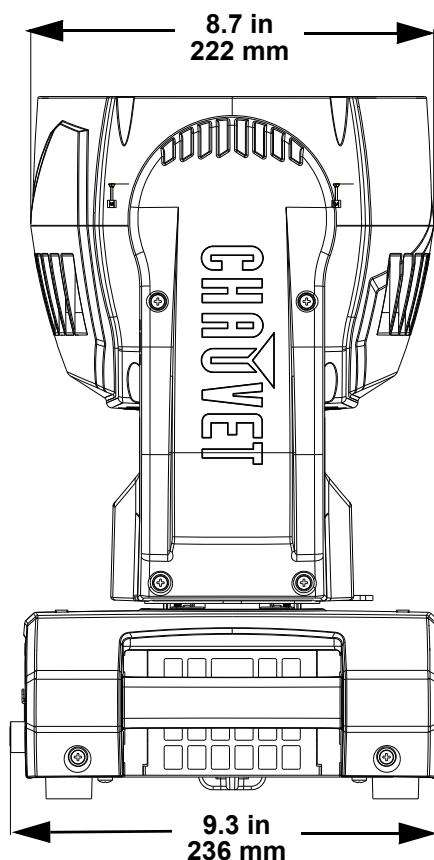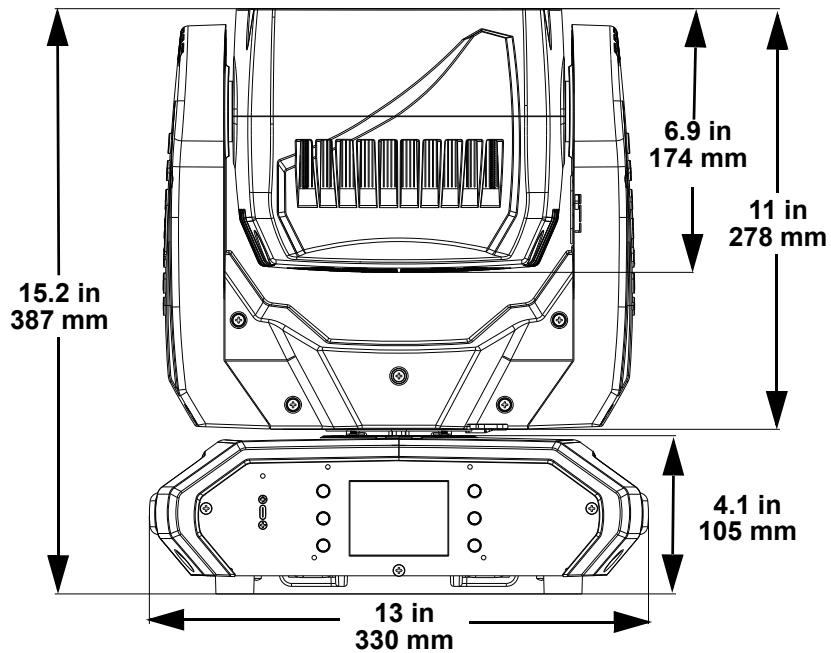

Setup

3. Setup

AC Power

The Maverick Force 2 BeamWash has an auto-ranging power supply and it can work with an input voltage range of 100 to 240 VAC, 50/60 Hz.

To determine the product's power requirements (circuit breaker, power outlet, and wiring), use the current value listed on the label affixed to the product's back panel, or refer to the product's specifications chart. The listed current rating indicates the product's average current draw under normal conditions.



- Always connect the product to a protected circuit (a circuit breaker or fuse). Make sure the product has an appropriate electrical ground to avoid the risk of electrocution or fire.
- To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.



Never connect the product to a rheostat (variable resistor) or dimmer circuit, even if the rheostat or dimmer channel serves only as a 0 to 100% switch.

AC Plug

The Maverick Force 2 BeamWash comes with a power input cable terminated with a Seetronic Powerkon A connector on one end and an Edison plug on the other end (U.S. market). Use the table below to wire a plug.

Connection	Wire (U.S.)	Wire (Europe)	Screw Color
AC Live	Black	Brown	Yellow or Brass
AC Neutral	White	Blue	Silver
AC Ground	Green/Yellow	Green/Yellow	Green

Power Linking

It is possible to power link Maverick Force 2 BeamWash products. See the table below for the current draw at each voltage and frequency:

	100 V, 60 Hz	120 V, 60 Hz	208 V, 60 Hz	230 V, 50 Hz	240 V, 60 Hz
Current Draw	6.35 A	5.23 A	2.96 A	2.68 A	2.55 A

Never exceed 12A on a single circuit. Power-linking cables can be purchased separately.

Fuse Replacement

1. Disconnect this product from the power outlet.
2. Using a flat-head screwdriver, unscrew the fuse holder cap from the housing.
3. Remove the blown fuse and replace with another fuse of the same type and rating (F 10 A, 250 V).
4. Screw the fuse holder cap back in place and reconnect power.

Remote Device Management

Remote Device Management, or RDM, is a standard for allowing DMX-enabled devices to communicate bi-directionally along existing DMX cabling. Check the DMX controller's User Manual or with the manufacturer as not all DMX controllers have this capability. The Maverick Force 2 BeamWash supports RDM protocol that allows feedback to make changes to menu map options.

USB Software Update

The Maverick Force 2 BeamWash allows for software updates with a USB device using the built-in USB port. To update the software using a USB flash drive, do the following:

1. Power on the product, and plug the flash drive into the USB port.
2. Once the flash drive has been detected, the message “**USB UPDATE**” will be displayed. Select **YES**.
3. The next screen will show the software versions available for this fixture on the USB drive. For multiple versions of the software for the same fixture, use **<UP>** or **<DOWN>** to select the desired version. Press **<ENTER>**.
4. The “**USB UPDATE**” screen will re-appear. Select **YES**.



It is possible to update multiple units with the USB if they are daisy chained via DMX.

5. The update will start. **DO NOT** turn off the power or disconnect the USB while the USB LED is still blinking during the process. The screen display will read: “**USB Update Wait**”. The update can take several minutes to complete.
 - When the USB firmware is done uploading, in some fixtures, the display will change to: “**DO NOT UNPLUG, UPDATING**”.
6. When the update is completed, the fixture will automatically reboot.
7. Go to Fixture Information on the product’s menu map and confirm the firmware revision.
8. When the boot-up process is finished, restart the product.



- Place the .chl file in the root directory of the USB drive.
- The product’s USB port supports up to 32GB capacity and only works with FAT32 file format.



Turning off the power or removing the USB while the USB LED is still blinking during the update will cause partial or total firmware failure in the targeted fixture(s). If this occurs, the user will need the UPLOAD 08 device to fix this. Please contact Chauvet regarding this device.

Setup

Mounting

Before mounting the product, read and follow the safety recommendations indicated in the Safety Notes. For the Chauvet Professional line of mounting clamps, go to <http://trusst.com/products/>.

Orientation

Always mount this product in a safe position, making sure there is adequate room for ventilation, configuration, and maintenance.

Rigging


Chauvet recommends using the following general guidelines when mounting this product.

- Before deciding on a location for the product, make sure there is easy access to the product for maintenance and programming purposes.
- Make sure that the structure and attachment points can support the weight before hanging the product (see the [Technical Specifications](#)).
- When mounting the product overhead, always use a safety cable. Mount the product securely to a rigging point, whether an elevated platform or a truss.
- When rigging the product onto a truss, use a mounting clamp of appropriate weight capacity.

Procedure

The Maverick Force 2 BeamWash comes with 2 Omega brackets to which the user can directly attach mounting clamps (sold separately). Make sure the clamps are capable of supporting the weight of this product. Use at least two mounting points per product. For the Chauvet Professional line of mounting clamps, go to <http://www.trusst.com/products>.

Mounting Diagram

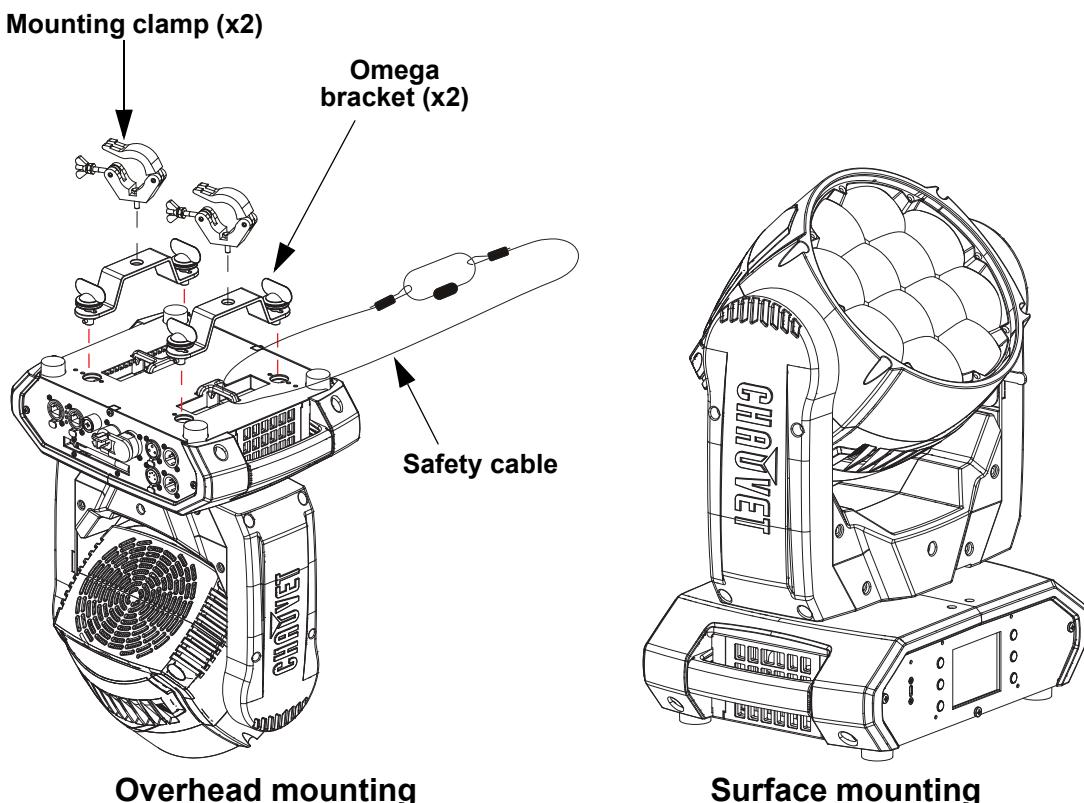

Signal Connections

The Maverick Force 2 BeamWash can receive a DMX, Art-Net™, or sACN, signal. The Maverick Force 2 BeamWash has two Amphenol XLRnet through ports, 3-pin and 5-pin DMX in and out ports. If using other compatible products with this product, it is possible to control each individually with a single controller.

Control Personalities

The Maverick Force 2 BeamWash uses a 3-pin and 5-pin DMX data connection, WDMX, Art-Net™, Kling-NET, or sACN for its control personalities:

Single Control	Dual Control Movement	Dual Control Pixels
Basic (20-channel)	Basic (8-channel)	Basic (36-channel)
Standard (68-channel)	Standard (20-channel)	Standard (48-channel)
Advanced (122-channel)	Advanced (26-channel)	Advanced (96-channel)
Tour (146-channel)		
Basic2 (25-channel)		

- Refer to the [Operation](#) chapter to learn how to configure the Maverick Force 2 BeamWash to work in these personalities.
- The [Control Channel Assignments and Values](#) section provides detailed information regarding the control personalities.



For more information about DMX standards or the DMX cables needed to link this product to a DMX controller, download the DMX Primer from the Chauvet website: www.chauvetprofessional.com.

DMX Linking

The Maverick Force 2 BeamWash can link to a DMX controller using a 3-pin and 5-pin DMX connection or a WDMX connection. For more information about DMX, read the DMX primer at: https://www.chauvetprofessional.com/wp-content/uploads/2016/06/DMX_Primer.pdf.

Art-Net™ Connection


Art-Net™ is an Ethernet protocol that uses TCP/IP that transfers a large amount of DMX512 data using an Amphenol XLRnet RJ45 connection over a large network. An Art-Net™ protocol document is available from www.chauvetprofessional.com.

Art-Net™ designed by and copyright Artistic Licence Holdings Ltd.

sACN Connection

Streaming ACN (Architecture for Control Networks), also known as ANSI E1.31, is an Ethernet protocol that uses the layering and formatting of ACN to transport DMX512 data over IP or any other ACN-compatible network.

Connection Diagram

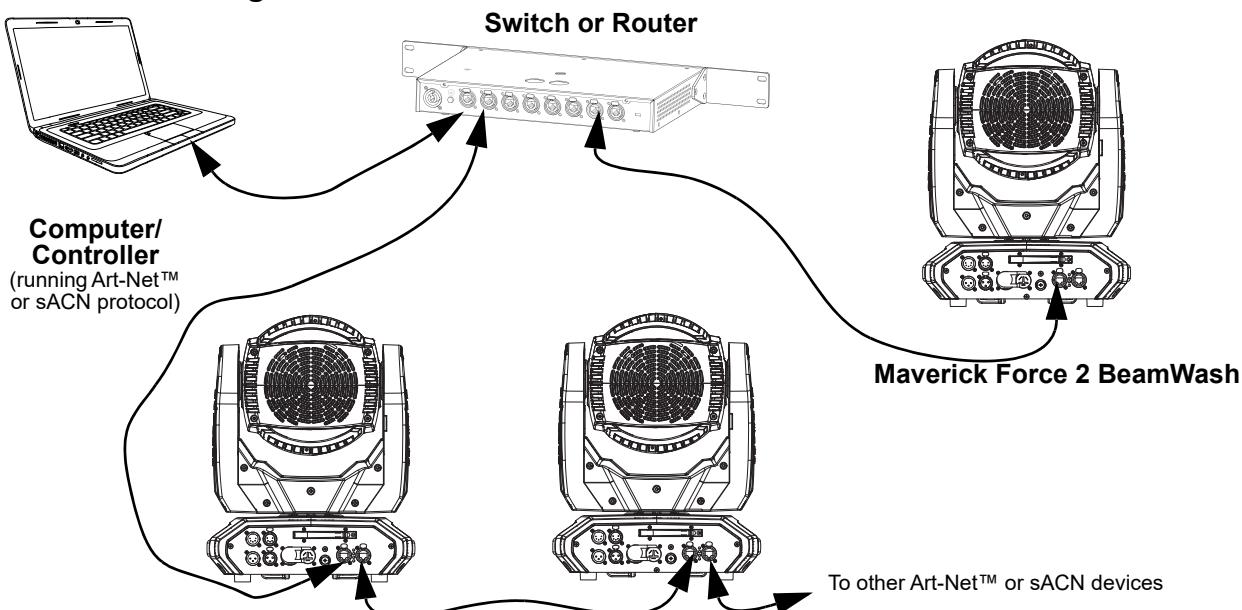


4. Operation

Control Panel Description

Button	Name	Function
↑	<UP>	Navigates upwards through the menu list or increases the value when in a function
☰	<MENU>	Exits from the current menu or function
↓	<DOWN>	Navigates downwards through the menu list or decreases the value when in a function
◀	<LEFT>	Navigates leftwards through the menu list
▶	<ENTER>	Enables the currently displayed menu or sets the selected value into the function
↗	<RIGHT>	Navigates rightwards through the menu list

Battery Powered Display

The Maverick Force 2 BeamWash has a battery powered display which enables access to the menu when the product is powered off. Press and hold <MENU> until the display activates (approximately 15 seconds).

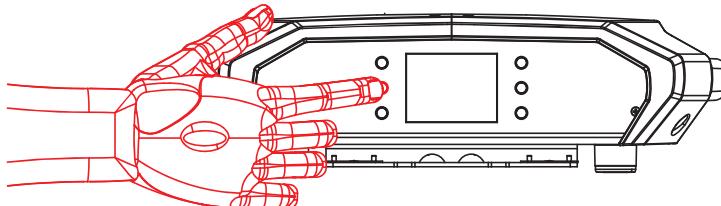

Home Screen

The Maverick Force 2 BeamWash has a home screen that shows the current control protocols, personalities, starting addresses, IP addresses, and universes. To see the home screen, press <MENU> repeatedly until it shows on the display. From the home screen, touch any of the displayed control settings to immediately jump to that part of the menu, such as the personality, starting address, or universe, or press <ENTER> to reach the main menu.

Control Panel Lock

The setting locks or unlocks the control panel.

1. Go to the **Settings** main level.
2. Select the **Lock Screen** option.
3. Select **NO** (control panel stays unlocked) or **YES** (locks control panel).



When the control panel lock is activated, the product will prompt for the passcode in order to access the menu. Enter the passcode as described below.


Passcode

After being prompted to enter the passcode, enter the numbers **0920**.

Operation

Technician Mode

The technician mode disables the pan/tilt motors, allowing the output of the product to be aimed by hand. To enable the technician mode of the Maverick Force 2 BeamWash, hold **<UP>** and **<LEFT>** while the product is powering on. When the product is turned off and back on, the pan and tilt will return to normal function.

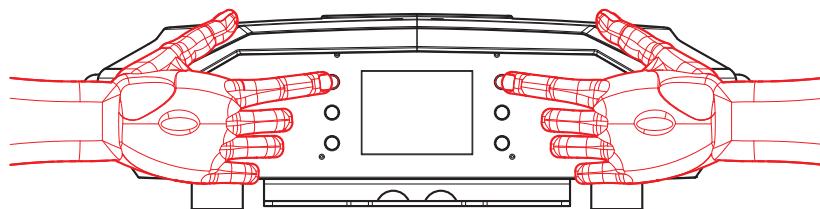

Menu Map

Refer to the Maverick Force 2 BeamWash product page on www.chauvetprofessional.com for the latest menu map and software.

Programming Levels				Description			
Control Settings				Control Settings Main Level			
Control Settings	Single Control	DMX	Personality	Basic			
				Standard			
				Advanced			
				Tour			
				Basic 2			
		ArtNet	Personality	Start Address 001–512			
				Basic			
				Standard			
				Advanced			
				Tour			
	sACN	Personality	Basic 2	Start Address 001–512			
				000–255			
				Universe			
				Basic			
				Standard			
	WDMX	Personality	Advanced	Advanced			
				Tour			
				Basic 2			
				Start Address 001–512			
				000–256			
				Sets the sACN universe			
				Sets the sACN starting address			
				Sets the sACN personality: (see Control Personalities)			
				Sets the Art-Net™ universe			
				Sets the Art-Net™ starting address			
				Sets the Art-Net™ personality: (see Control Personalities)			
				Sets the WDMX universe			
				Sets the WDMX starting address			
				Sets the WDMX personality: (see Control Personalities)			

Programming Levels				Description
Control Settings (cont.)				Control Settings Main Level
Control Settings	Movement	DMX	Personality	Basic
				Standard
				Advanced
		ArtNet	Start Address	1–512
			Personality	Basic
			Standard	Sets the Art-Net™ personality: (see Control Personalities)
			Advanced	Sets the Art-Net™ starting address
		sACN	Start Address	0–255
			Personality	Basic
			Standard	Sets the sACN personality: (see Control Personalities)
Dual Control	Pixels	DMX	Advanced	Sets the sACN starting address
			Start Address	1–512
		ArtNet	Personality	Basic
			Standard	Sets the DMX personality (see Control Personalities)
			Advanced	Sets the Art-Net™ starting address
		sACN	Start Address	001–512
			Personality	Basic
			Standard	Sets the Art-Net™ personality: (see Control Personalities)
			Advanced	Sets the Art-Net™ starting address
			Universe	000–255
Test Mode	Main Level	Kling-Net	Personality	Basic
				Standard
				Sets the Kling-Net personality: (see Control Personalities)

Main Level	Programming Levels	Description	
Auto Test		Auto test all functions	
Test Mode	Manual Test	000–255	Pan
			Tilt
			Red
			Green
			Blue
			White
			CTC
			Color
			Pattern
			LED Macro

Operation

Main Level	Programming Levels			Description
Test Mode (cont.)	Manual Test (cont.)	Background	000–255	Manually control and test all settings through the control panel
		Background Dim.		
		Dimmer		
		Shutter		
		Function		
		Zoom		
Setup	Network Settings	IP Mode	Manual	Manually set IP address
			DHCP	Network sets IP address
			Static	Product sets IP address
		Ip	-----	Sets IP address in Manual mode
		SubMask	-----	Sets Subnet Mask in Manual mode
	Pan Reverse	NO	Normal pan	
		YES	Reversed pan	
	Tilt Reverse	NO	Normal tilt	
		YES	Reversed tilt	
	Zoom Reverse	NO	Normal Zoom	
		YES	Reversed Zoom	
	Screen Reverse	NO	Normal display	
		YES	Inverted display	
		AUTO	Automatic display orientation	
	Pan Angle	540	540° pan range	
		360	360° pan range	
		180	180° pan range	
	Tilt Angle	270	270° tilt range	
		180	180° tilt range	
		90	90° tilt range	
	BL. O. P/T Move	NO	Do not black out while pan/tilt	
		YES	Blackout while pan/tilt	
	Calibration	NO	Keep current settings	
		YES	Calibrate touchscreen	
	Touchscreen Lock	NO	Display responds to touch	
		YES	Display does not respond to touch	
	Lock Screen	NO	Lock the buttons and touch screen	
		YES	Passcode: 0920	
	Swap XY	NO	Do not swap pan and tilt	
		YES	Pan controls tilt, tilt controls pan	
	WDMX Reset	NO	Do not reset WDMX	
		YES	Reset WDMX	
	Backlight Timer	30S	Display turns off after 30 seconds	
		1M	Display turns off after 1 minute	
		5M	Display turns off after 5 minutes	
		ON	Display stays on	
	Loss of Data	Hold	Holds last signal received	
		Close	Blacks out fixture	

Main Level	Programming Levels		Description
Setup (cont.)	Fans	Auto	Fan speed according to product temperature
		Full	Fan speed set on high
		ECO	Quiet mode
		TV25	Maintains LED output up to an ambient temperature of 77 °F (25 °C) (TV25) or 95 °F (35 °C) (TV35).
		TV35	When using these fan modes, please set the PWM Options to 6000Hz or 15000Hz to prevent any harmonization noise.
	C Mixing Mode	RGBW	RGBW mode
		CMY	CMY mode (R=C, G=M, B=Y)
	Dimmer Curve	Linear	Set the dimmer curve
		Square	
		I Squa	
		SCurve	
	Dimmer Speed	Smooth	Set the dimmer speed
		Fast	
	PWM Option	600Hz	Define Pulse Width Modulation setting
		1200Hz	
		2000Hz	
		4000Hz	
		6000Hz	
		15000Hz	
	Color Balance	Red	Sets red LED maximum value
		Green	
		Blue	
		White	
	Calibrated White	ON	Calibrated white balance
		OFF	Uses maximum white values
		Custom	Uses custom white balance
	White Balance	Red	Sets red LED maximum value
		Green	
		Blue	
		White	
	Preset Select	PRESET A	Recorded preset menu options
		PRESET B	
		PRESET C	
	Preset Sync	NO	Allows recorded preset menu options to be transferred to other Maverick Force 2 BeamWash products in the DMX daisy chain
		YES	
	USB Update	NO	Update firmware via USB C
		YES	

Operation

Main Level	Programming Levels			Description
Setup (cont.)	Reset Function	Pan/Tilt	NO YES	Reset individual functions or all functions from start-up
		Zoom	NO YES	
		All	NO YES	
	Factory Settings	NO YES		Reset to factory default settings
		Ver	V_	Shows firmware version
		Running Mode	---	Shows current running mode
Sys Info	Fixture Information	Address	---/---	Shows current starting address
		Temperature	---	Shows current product temperature in °C
		Fixture Hours	-----	Shows number of hours product has been powered on
		Ip	-----	Shows current IP address
		SubMask	-----	Shows current Subnet Mask
		MAC	-----	Shows current MAC address
		LED Hours	-----	Shows number of hours LEDs have been powered on
		Head Fan1 Speed	-----	Shows speed of head fans in rpm
	Fan Information	Head Fan2 Speed	-----	
		Base Fan1 Speed	-----	
		Base Fan2 Speed	-----	
	Error Information	No Error!*		Shows any errors, or No Error!
	Channel Information	Frequency	----	Shows all current values from input signals, 000–255
		Pan		
		Pan Fine		
		Tilt		
		Tilt Fine		
		CTC		
		Color		
		Pattern		
		LED Macro		
		LED Ma. Speed		
		LED Ma. Fade		
		Background		
		Background Dim.		
		Big. Dim. Fine		
		Dimmer		
		Dimmer Fine		

Main Level	Programming Levels		Description
Sys Info (cont.)	Channel Information (cont.)	Shutter	Shows all current values from input signals, 000–255
		Zoom	
		Function	
		Red	
		Red Fine	
		Green	
		Green Fine	
		Blue	
		Blue Fine	
		White	
		White Fine	
		Dimmer (all, 1–12)	
		Dimmer Fine (all, 1–12)	
		Red (all, 1–12)	
		Red Fine (all, 1–12)	
		Green (all, 1–12)	
		Green Fine (all, 1–12)	
		Blue (all, 1–12)	
		Blue Fine (all, 1–12)	
		White (all, 1–12)	
		White Fine (all, 1–12)	

Operation

Control Configuration

Use control configurations to operate the product with a DMX, Art-Net™, or sACN controller.

Control Mode

The Maverick Force 2 BeamWash works with wired DMX, WDMX, Art-Net™, Kling-Net, and sACN control signals. To select which single control protocol to use:

1. Go to the **Control Settings** main level.
2. Select the **Single Control** option
3. Select the desired protocol, from **DMX**, **ArtNet**, **sACN**, or **WDMX**.

To select which dual control protocol to use:

1. Go to the **Control Settings** main level.
2. Select the **Dual Control** option
1. Select either **Movement** (select from **DMX**, **ArtNet**, or **sACN**) or **Pixels** (select from **DMX**, **ArtNet**, or **KlingNet**).

Control Personalities

To set the control personality:

1. Select the **Personality** option.
2. Select the desired personality, from:

Single Control	Dual Control Movement	Dual Control Pixels
Basic (20-channel)	Basic (8-channel)	Basic (36-channel)
Standard (68-channel)	Standard (20-channel)	Standard (48-channel)
Advanced (122-channel)	Advanced (26-channel)	Advanced (96-channel)
Tour (146-channel)		
Basic2 (25-channel)		



- See the [Starting Address](#) section for the highest selectable starting address for each personality.
- Make sure that the starting addresses on the various products do not overlap due to the new personality setting.

Starting Address

Each product will respond to a unique starting address from the controller. All products with the same starting address will respond in unison.

To set the starting address in Single Control mode:

1. Go to the **Address Setting** level.
2. Select the starting address (**001–512**).
 - The highest recommended starting address for **Basic** mode is **492**.
 - The highest recommended starting address for **Standard** mode is **444**.
 - The highest recommended starting address for **Advanced** mode is **390**.
 - The highest recommended starting address for **Tour** mode is **366**.
 - The highest recommended starting address for **Basic 2** mode is **487**.

To set the starting address in Dual Control mode:

1. Go to the **Movement Address Setting** level or the **Pixels Address Setting** level.
2. Select the starting address (**001–512**)
 - The highest recommended starting address for **Basic** mode is **477**.
 - The highest recommended starting address for **Standard** mode is **465**.
 - The highest recommended starting address for **Advanced** mode is **417**.

Network Setup

The Network Setup settings control the IP address, subnet mask, and universe of the product.

IP Mode

To choose how the IP address is set:

1. Go to the **Network Setup** level.
2. Select the **IP Mode** option.
3. Select the desired IP mode, from **Manual** (to set a custom IP address), **DHCP** (the IP address is assigned by the connected network), or **Static** (the product uses a default, preset IP address).

Universe

To assign an Art-Net™ or sACN universe to the Maverick Force 2 BeamWash:

1. Go to the **ArtNet Setting** or **sACN Setting** level.
2. Select the **Universe** option.
3. Set the universe, from **000–255** (for Art-Net™) or from **001–256** (for sACN).

Manual IP Address

To set the IP address when the **IP Mode** is set to **Manual**:

1. Go to the **Network Setup** level.
2. Select the **Ip** option.
3. Set the 4 values of the IP address from **000–255**.


Subnet Mask

To set the subnet mask:

1. Go to the **Network Setup** level.
2. Select the **SubMask** option.
3. Set the 4 values of the subnet mask from **000–255**.

Control Channel Assignments and Value

Pixel Chart

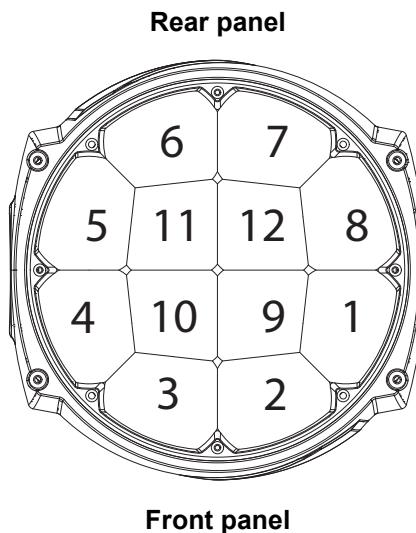

Operation

Control Channel Assignments and Values

Single Control Values

B: Basic (20 channels), B2: Basic 2 (25 channels), S: Standard (68 channels), A: Advanced (122 channels), T: Tour (146 channels)

B	B2	S	A	T	Function	Value	Percent/Setting
1	1	1	1	1	Pan	000 ⇄ 255	0–100%
2	2	2	2	2	Pan fine	000 ⇄ 255	0–100%
3	3	3	3	3	Tilt	000 ⇄ 255	0–100%
4	4	4	4	4	Tilt fine	000 ⇄ 255	0–100%
5	5	5	5	5	CTC	000 001 ⇄ 255	No function Color temperature, 10000–2800K
6	6	6	6	6	Color macro	000 001 ⇄ 255	No function Color macros
7	7	7	7	7	Gobo	000 001 ⇄ 168 169 ⇄ 255	No function Gobos (indexed) No function
8	8	8	8	8	LED macro/ Auto program	000 ⇄ 015 016 ⇄ 085 086 ⇄ 135 136 ⇄ 205 206 ⇄ 255	No function LED macros Cycles all macros Auto programs Cycles all automatic programs
9	9	9	9	9	LED macro/ Auto program speed	000 ⇄ 127 128 129 ⇄ 255	Auto speed, fast to slow Hold Auto speed, slow to fast
10	10	10	10	10	LED macro delay	000 ⇄ 255	Fast to slow
11	11	11	11	11	Background color	000	No function
						001 ⇄ 002	2700K R: 156 G: 118 B: 0 W: 63
						003 ⇄ 004	3200K R: 156 G: 141 B: 5 W: 89
						005 ⇄ 006	4200K R: 156 G: 141 B: 14 W: 255
						007 ⇄ 008	5600K R: 156 G: 207 B: 54 W: 255
						009 ⇄ 010	8000K R: 130 G: 255 B: 96 W: 255
						011	Blue R: 0 G: 0 B: 255 W: 0
						012 ⇄ 048	+ Green R: 0 G: 0–255 B: 255 W: 0
						049	Cyan R: 0 G: 255 B: 255 W: 0
						050 ⇄ 086	- Blue R: 0 G: 255 B: 255–0 W: 0
						087	Green R: 0 G: 255 B: 0 W: 0
						088 ⇄ 124	+ Red R: 0–255 G: 255 B: 0 W: 0
						125	Yellow R: 255 G: 255 B: 0 W: 0
						126 ⇄ 162	- Green R: 255 G: 255–0 B: 0 W: 0
						163	Red R: 255 G: 0 B: 0 W: 0
						164 ⇄ 200	+ Blue R: 255 G: 0 B: 0–255 W: 0
						201	Magenta R: 255 G: 0 B: 255 W: 0
						202 ⇄ 238	- Red R: 255–0 G: 0 B: 255 W: 0
						239	Blue R: 0 G: 0 B: 255 W: 0
						240 ⇄ 247	Color fade, fast to slow
						248 ⇄ 255	Color snap, fast to slow
12	12	12	12	12	Background dimmer	000 ⇄ 255	0–100%

B	B2	S	A	T	Function	Value	Percent/Setting
–	–	13	13	13	Background fine dimmer	000 ⇔ 255	0–100%
13	13	13	14	14	Main dimmer	000 ⇔ 255	0–100%
–	14	–	15	15	Main fine dimmer	000 ⇔ 255	0–100%
14	15	14	16	16	Shutter	000 ⇔ 019	Off
						020 ⇔ 024	On
						025 ⇔ 064	Strobe, fast to slow
						065 ⇔ 069	On
						070 ⇔ 084	Strobe 100–0%, fast to slow
						085 ⇔ 089	On
						090 ⇔ 104	Strobe 0–100%, fast to slow
						105 ⇔ 109	On
						110 ⇔ 124	Random strobe, fast to slow
						125 ⇔ 129	On
						130 ⇔ 144	Random strobe 100–0%, fast to slow
						145 ⇔ 149	On
						150 ⇔ 164	Random strobe 0–100%, fast to slow
						165 ⇔ 169	On
						170 ⇔ 184	Pulse strobe, fast to slow
						185 ⇔ 189	On
						190 ⇔ 204	Random pulse strobe, fast to slow
						205 ⇔ 209	On
						210 ⇔ 224	Strobe 0–100–0%, fast to slow
						225 ⇔ 229	On
						230 ⇔ 244	Random pulse strobe, fast to slow
						245 ⇔ 255	On
15	16	15	17	17	Zoom	000 ⇔ 255	Wide to narrow

Operation

B	B2	S	A	T	Function	Value	Percent/Setting
16	17	16	18	18	Control	000 ⇔ 009	No function
						010 ⇔ 014	Blackout on pan/tilt
						015 ⇔ 019	Reserved for future use
						020 ⇔ 024	RGBW color mixing mode
						025 ⇔ 029	CMY color mixing mode (R=C, G=M, B=Y)
						030 ⇔ 049	Reserved for future use
						050 ⇔ 054	Pan reset
						055 ⇔ 059	Tilt reset
						060 ⇔ 064	Zoom reset
						065 ⇔ 069	Reserved for future use
						060 ⇔ 064	Zoom reset
						065 ⇔ 069	Reserved for future use
						070 ⇔ 074	Reset all
						075 ⇔ 079	Reserved for future use
						080 ⇔ 084	Pan/tilt reverse
						085 ⇔ 089	Pan reverse
						090 ⇔ 094	Tilt reverse
						095 ⇔ 099	Disable pan reverse
						100 ⇔ 104	Disable tilt reverse
						105 ⇔ 109	Disable pan/tilt reverse
						110 ⇔ 119	Reserved for future use
						120 ⇔ 124	Fan ECO
						125 ⇔ 129	Fan full
						130 ⇔ 134	Fan AUTO
						135 ⇔ 139	Dimmer fast
						140 ⇔ 144	Dimmer smooth
						145 ⇔ 149	Linear
						150 ⇔ 154	Square
						155 ⇔ 159	I Square
						160 ⇔ 164	Scurve
						165 ⇔ 169	WHITE mode
						170 ⇔ 174	FULL mode
						175 ⇔ 179	Single color color calibration OFF
						180 ⇔ 184	Single color color calibration ON
						185 ⇔ 186	PWM 600Hz
						187 ⇔ 188	PWM 1200Hz
						189 ⇔ 190	PWM 2000Hz
						191 ⇔ 192	PWM 4000Hz
						193 ⇔ 194	PWM 6000Hz
						195 ⇔ 196	PWM 15000Hz
						197 ⇔ 239	No function
						240 ⇔ 247	Calibration ON
						248 ⇔ 255	Calibration OFF
17	18	17	19	19	Main red	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	19	–	20	20	Main red fine	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
18	20	18	21	21	Main green	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

B	B2	S	A	T	Function	Value	Percent/Setting
-	21	-	22	22	Main green fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
19	22	19	23	23	Main blue	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	23	-	24	24	Main blue fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
20	24	20	25	25	Main white	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	25	-	26	26	Main white fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	27	Dimmer 1	000 ⇄ 255	0–100%
-	-	-	-	28	Dimmer fine 1	000 ⇄ 255	0–100%
-	-	21	27	29	Red 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	28	30	Red fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	22	29	31	Green 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	30	32	Green fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	23	31	33	Blue 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	32	34	Blue fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	24	33	35	White 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	34	36	White fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	37	Dimmer 2	000 ⇄ 255	0–100%
-	-	-	-	38	Dimmer fine 2	000 ⇄ 255	0–100%
-	-	25	35	39	Red 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	36	40	Red fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	26	37	41	Green 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	38	42	Green fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	27	39	43	Blue 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	40	44	Blue fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	28	41	45	White 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	42	46	White fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	47	Dimmer 3	000 ⇄ 255	0–100%
-	-	-	-	48	Dimmer fine 3	000 ⇄ 255	0–100%
-	-	29	43	49	Red 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	44	50	Red fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	30	45	51	Green 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	46	52	Green fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	31	47	53	Blue 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	48	54	Blue fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	32	49	55	White 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	50	56	White fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	57	Dimmer 4	000 ⇄ 255	0–100%
-	-	-	-	58	Dimmer fine 4	000 ⇄ 255	0–100%
-	-	33	51	59	Red 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	52	60	Red fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	34	53	61	Green 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	54	62	Green fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	35	55	63	Blue 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	56	64	Blue fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	36	57	65	White 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	58	66	White fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	67	Dimmer 5	000 ⇄ 255	0–100%

Operation

B	B2	S	A	T	Function	Value	Percent/Setting
-	-	-	-	68	Dimmer fine 5	000 ↔ 255	0–100%
-	-	37	59	69	Red 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	60	70	Red fine 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	38	61	71	Green 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	62	72	Green fine 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	39	63	73	Blue 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	64	74	Blue fine 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	40	65	75	White 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	66	76	White fine 5	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	77	Dimmer 6	000 ↔ 255	0–100%
-	-	-	-	78	Dimmer fine 6	000 ↔ 255	0–100%
-	-	41	67	79	Red 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	68	80	Red fine 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	42	69	81	Green 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	70	82	Green fine 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	43	71	83	Blue 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	72	84	Blue fine 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	44	73	85	White 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	74	86	White fine 6	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	87	Dimmer 7	000 ↔ 255	0–100%
-	-	-	-	88	Dimmer fine 7	000 ↔ 255	0–100%
-	-	45	75	89	Red 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	76	90	Red fine 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	46	77	91	Green 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	78	92	Green fine 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	47	79	93	Blue 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	80	94	Blue fine 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	48	81	95	White 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	82	96	White fine 7	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	97	Dimmer 8	000 ↔ 255	0–100%
-	-	-	-	98	Dimmer fine 8	000 ↔ 255	0–100%
-	-	49	83	99	Red 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	84	100	Red fine 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	50	85	101	Green 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	86	102	Green fine 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	51	87	103	Blue 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	88	104	Blue fine 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	52	89	105	White 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	90	106	White fine 8	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	107	Dimmer 9	000 ↔ 255	0–100%
-	-	-	-	108	Dimmer fine 9	000 ↔ 255	0–100%
-	-	53	91	109	Red 9	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	92	110	Red fine 9	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	54	93	111	Green 9	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	94	112	Green fine 9	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	55	95	113	Blue 9	000 ↔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

B	B2	S	A	T	Function	Value	Percent/Setting
-	-	-	96	114	Blue fine 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	56	97	115	White 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	98	116	White fine 9	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	117	Dimmer 10	000 ⇔ 255	0–100%
-	-	-	-	118	Dimmer fine 10	000 ⇔ 255	0–100%
-	-	57	99	119	Red 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	100	120	Red fine 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	58	101	121	Green 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	102	122	Green fine 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	59	103	123	Blue 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	104	124	Blue fine 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	60	105	125	White 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	106	126	White fine 10	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	127	Dimmer 11	000 ⇔ 255	0–100%
-	-	-	-	128	Dimmer fine 11	000 ⇔ 255	0–100%
-	-	61	107	129	Red 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	108	130	Red fine 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	62	109	131	Green 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	110	132	Green fine 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	63	111	133	Blue 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	112	134	Blue fine 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	64	113	135	White 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	114	136	White fine 11	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	-	137	Dimmer 12	000 ⇔ 255	0–100%
-	-	-	-	138	Dimmer fine 12	000 ⇔ 255	0–100%
-	-	65	115	139	Red 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	116	140	Red fine 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	66	117	141	Green 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	118	142	Green fine 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	67	119	143	Blue 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	120	144	Blue fine 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	68	121	145	White 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	-	122	146	White fine 12	000 ⇔ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

Operation

Dual Control Movement Values

B: Basic (8 channels), S: Standard (20 channels), A: Advanced (26 channels)

B	S	A	Function	Value	Percent/Setting
1	1	1	Pan	000 ⇄ 255	0–100%
2	2	2	Pan fine	000 ⇄ 255	0–100%
3	3	3	Tilt	000 ⇄ 255	0–100%
4	4	4	Tilt fine	000 ⇄ 255	0–100%
–	5	5	CTC	000 001 ⇄ 255	No function Color temperature, 10000–2800 K
–	6	6	Color macro	000 001 ⇄ 255	No function Color macros
–	7	7	Gobo	000 001 ⇄ 168 169 ⇄ 255	No function Gobos (indexed) No function
–	8	8	LED macro/ Auto program	000 ⇄ 015 016 ⇄ 085 086 ⇄ 135 136 ⇄ 205 206 ⇄ 255	No function LED macros Cycles all macros Auto programs Cycles all automatic programs
–	9	9	LED macro/ Auto program speed	000 ⇄ 127 128 129 ⇄ 255	Auto speed, fast to slow Hold Auto speed, slow to fast
–	10	10	LED macro delay	000 ⇄ 255	Fast to slow
–	11	11	Background color	000 001 ⇄ 002 003 ⇄ 004 005 ⇄ 006 007 ⇄ 008 009 ⇄ 010 011 012 ⇄ 048 049 050 ⇄ 086 087 088 ⇄ 124 125 126 ⇄ 162 163 164 ⇄ 200 201 202 ⇄ 238 239 240 ⇄ 247 248 ⇄ 255	No function 2700K R: 156 G: 118 B: 0 W: 63 3200K R: 156 G: 141 B: 5 W: 89 4200K R: 156 G: 141 B: 14 W: 255 5600K R: 156 G: 207 B: 54 W: 255 8000K R: 130 G: 255 B: 96 W: 255 Blue R: 0 G: 0 B: 255 W: 0 + Green R: 0 G: 0–255 B: 255 W: 0 Cyan R: 0 G: 255 B: 255 W: 0 - Blue R: 0 G: 255 B: 255–0 W: 0 Green R: 0 G: 255 B: 0 W: 0 + Red R: 0–255 G: 255 B: 0 W: 0 Yellow R: 255 G: 255 B: 0 W: 0 - Green R: 255 G: 255–0 B: 0 W: 0 Red R: 255 G: 0 B: 0 W: 0 + Blue R: 255 G: 0 B: 0–255 W: 0 Magenta R: 255 G: 0 B: 255 W: 0 - Red R: 255–0 G: 0 B: 255 W: 0 Blue R: 0 G: 0 B: 255 W: 0 Color fade, fast to slow Color snap, fast to slow
–	12	12	Background dimmer	000 ⇄ 255	0–100%
–	–	13	Background fine dimmer	000 ⇄ 255	0–100%
5	13	14	Main dimmer	000 ⇄ 255	0–100%

B	S	A	Function	Value	Percent/Setting
-	-	15	Main fine dimmer	000 ⇄ 255	0–100%
				000 ⇄ 019	Off
				020 ⇄ 024	On
				025 ⇄ 064	Strobe, fast to slow
				065 ⇄ 069	On
				070 ⇄ 084	Strobe 100–0%, fast to slow
				085 ⇄ 089	On
				090 ⇄ 104	Strobe 0–100%, fast to slow
				105 ⇄ 109	On
				110 ⇄ 124	Random strobe, fast to slow
				125 ⇄ 129	On
6	14	16	Shutter	130 ⇄ 144	Random strobe 100–0%, fast to slow
				145 ⇄ 149	On
				150 ⇄ 164	Random strobe 0–100%, fast to slow
				165 ⇄ 169	On
				170 ⇄ 184	Pulse strobe, fast to slow
				185 ⇄ 189	On
				190 ⇄ 204	Random pulse strobe, fast to slow
				205 ⇄ 209	On
				210 ⇄ 224	Strobe 0–100–0%, fast to slow
				225 ⇄ 229	On
				230 ⇄ 244	Random pulse strobe, fast to slow
				245 ⇄ 255	On
7	15	17	Zoom	000 ⇄ 255	Wide to narrow

Operation

B	S	A	Function	Value	Percent/Setting
8	16	18	Control	000 ⇄ 009	No function
				010 ⇄ 014	Blackout on pan/tilt
				015 ⇄ 019	Reserved for future use
				020 ⇄ 024	RGBW color mixing mode
				025 ⇄ 029	CMY color mixing mode (R=C, G=M, B=Y)
				030 ⇄ 049	Reserved for future use
				050 ⇄ 054	Pan reset
				055 ⇄ 059	Tilt reset
				060 ⇄ 064	Zoom reset
				065 ⇄ 069	Reserved for future use
				070 ⇄ 074	Reset all
				075 ⇄ 109	Reserved for future use
				110 ⇄ 114	Fast pan/tilt speed
				115 ⇄ 119	Slow pan/tilt speed
				120 ⇄ 124	Slow fan mode
				125 ⇄ 129	Full fan mode
				130 ⇄ 134	Auto fan mode
				135 ⇄ 139	Fast dimmer mode
				140 ⇄ 144	Slow dimmer mode
				145 ⇄ 223	Reserved for future use
				224 ⇄ 231	White mode on
				232 ⇄ 239	White mode off
				240 ⇄ 255	Reserved for future use
-	17	19	Main red	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	20	Main red fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	18	21	Main green	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	22	Main green fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	19	23	Main blue	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	24	Main blue fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	20	25	Main white	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
-	-	26	Main white fine	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

Dual Control Pixels Values

B: Basic (36 channels), S: Standard (48 channels), A: Advanced (96 channels)

B	S	A	Function	Value	Percent/Setting
1	1	1	Red 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	2	Red fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
2	2	3	Green 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	4	Green fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
3	3	5	Blue 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	6	Blue fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	4	7	White 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	8	White fine 1	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
4	5	9	Red 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	10	Red fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
5	6	11	Green 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	12	Green fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
6	7	13	Blue 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	14	Blue fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	8	15	White 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	16	White fine 2	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
7	9	17	Red 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	18	Red fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
8	10	19	Green 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	20	Green fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
9	11	21	Blue 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	22	Blue fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	12	23	White 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	24	White fine 3	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
10	13	25	Red 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	26	Red fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
11	14	27	Green 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	28	Green fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
12	15	29	Blue 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	30	Blue fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	16	31	White 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	32	White fine 4	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
13	17	33	Red 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	34	Red fine 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
14	18	35	Green 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	36	Green fine 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
15	19	37	Blue 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	38	Blue fine 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	20	39	White 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	40	White fine 5	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
16	21	41	Red 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	42	Red fine 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
17	22	43	Green 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	44	Green fine 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

Operation

B	S	A	Function	Value	Percent/Setting
18	23	45	Blue 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	46	Blue fine 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	24	47	White 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	48	White fine 6	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
19	25	49	Red 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	50	Red fine 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
20	26	51	Green 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	52	Green fine 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
21	27	53	Blue 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	54	Blue fine 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	28	55	White 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	56	White fine 7	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
22	29	57	Red 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	58	Red fine 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
23	30	59	Green 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	60	Green fine 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
24	31	61	Blue 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	62	Blue fine 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	32	63	White 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	64	White fine 8	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
25	33	65	Red 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	66	Red fine 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
26	34	67	Green 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	68	Green fine 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
27	35	69	Blue 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	70	Blue fine 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	36	71	White 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	72	White fine 9	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
28	37	73	Red 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	74	Red fine 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
29	38	75	Green 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	76	Green fine 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
30	39	77	Blue 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	78	Blue fine 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	40	79	White 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	80	White fine 10	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
31	41	81	Red 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	82	Red fine 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
32	42	83	Green 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	84	Green fine 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
33	43	85	Blue 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	86	Blue fine 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	44	87	White 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	88	White fine 11	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
34	45	89	Red 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	90	Red fine 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

B	S	A	Function	Value	Percent/Setting
35	46	91	Green 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	92	Green fine 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
36	47	93	Blue 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	94	Blue fine 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	48	95	White 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%
–	–	96	White fine 12	000 ⇄ 255	RGBW Mode: 0–100% / CMY Mode: 100–0%

Operation

Settings Configuration

Pan Reverse

To set the orientation of the pan:

1. Go to the **Settings** main level.
2. Select the **Pan Reverse** option.
3. Select from **NO** (normal pan motion), or **YES** (reversed pan motion).

Tilt Reverse

To set the orientation of the tilt:

1. Go to the **Settings** main level.
2. Select the **Tilt Reverse** option.
3. Select from **NO** (normal tilt motion), or **YES** (reversed tilt motion).

Zoom Reverse

To set the orientation of the zoom:

1. Go to the **Settings** main level.
2. Select the **Zoom Reverse** option.
3. Select from **NO** (normal zoom), or **YES** (reversed zoom).

Screen Reverse

To set the orientation of the display:

1. Go to the **Settings** main level.
2. Select the **Screen Reverse** option.
3. Select from **NO** (right-side up), **YES** (upside-down), or **AUTO** (automatic orientation).

Pan Angle

To set the maximum angle of the pan:

1. Go to the **Settings** main level.
2. Select the **Pan Angle** option.
3. Select from **540** (540°), **360** (360°), or **180** (180°).

Tilt Angle

To set the maximum angle of the tilt:

1. Go to the **Settings** main level.
2. Select the **Tilt Angle** option.
3. Select from **270** (260°), **180** (180°), or **090** (90°).

Black out on Movement

To set the product to black out while the pan/tilt, color wheel, or gobo wheels are moving:

1. Go to the **Settings** main level.
2. Select the **BL. O. P/T Move** option.
3. Select from **NO** or **YES**.

Calibration

To set the calibration:

1. Go to the **Settings** main level.
2. Select the **Calibration** option.
3. Select from **NO** or **YES**.

Touchscreen Lock

1. Go to the **Settings** main level.
2. Select the **Touchscreen Lock** option.
3. Select from **NO** or **YES**.

Lock Screen

To swap the controls for the pan and tilt:

1. Go to the **Settings** main level.
2. Select the **Lock Screen** option.
3. Select from **NO** or **YES**.

Swap Pan and Tilt

To swap the controls for the pan and tilt:

1. Go to the **Settings** main level.
2. Select the **Swap XY** option.
3. Select from **NO** (pan controls pan, tilt controls tilt) or **YES** (pan controls tilt, tilt controls pan).

WDMX Reset

To reset the WDMX connection:

1. Go to the **Settings** main level.
2. Select the **WDMX Reset** option.
3. Select from **NO** or **YES**.

Display Backlight Timer

To set how long before an inactive display will turn off:

1. Go to the **Settings** main level.
2. Select the **Backlight Timer** option.
3. Select the length of the backlight timer, from **30S** (30 seconds), **1M** (1 minute), **5M** (5 minutes), or **ON** (always on).

Loss of Data

To select how the product will respond to a loss of the control signal:

1. Go to the **Settings** main level.
2. Select the **Loss of Data** option.
3. Select from **Hold** (holds last signal received) or **Close** (blacks out fixture).

Fan speed

To set the speed of the fans:

1. Go to the **Settings** main level.
2. Select the **Fans** option.
3. Select from **Auto** (fan speed set according to product temperature), **Full** (maximum speed), **ECO** (quiet fans mode), **TV25** (maintains temperature of 77°F /25°C), or **TV35** (maintains temperature of 95°F / 35°C).

Color mixing mode

To set the color mixing mode:

1. Go to the **Settings** main level.
2. Select the **C Mixing Mode** option.
3. Select **RGBW** (additive mode: red, green, blue, and white), or **CMY** (subtractive mode: red controls cyan, green controls magenta, blue controls yellow).

Dimmer curve

To set the dimmer curve:

1. Go to the **Settings** main level.
2. Select the **Dimmer Curve** option.
3. Select the **Linear**, **Square**, **I Squa**, or **SCurve**.

Dimmer speed

To set the dimmer speed:

1. Go to the **Settings** main level.
2. Select the **Dimmer speed** option.
3. Select **Smooth** or **Fast**.

Pulse Width Modulation

To adjust the frequency of the pulse width modulation:

1. Go to the **Settings** main level.
2. Select the **PWM Options** option.
3. Select **600Hz**, **1200Hz**, **2000Hz**, **4000Hz**, **6000Hz**, or **15000Hz**.

Operation

Color balance

To set the maximum values of a given color in the mix:

1. Go to the **Settings** main level.
2. Select the **Color Balance** option.
3. Select from **Red**, **Green**, **Blue**, or **White** options.
4. Select a value from **100–255**

Calibrated White

To set the white mode:

1. Go to the **Settings** main level.
2. Select the **Calibrated White** option.
3. Select from **ON** (uses the factory-calibrated white balance), **OFF** (uses the maximum white values), or **Custom** (uses the custom white values defined under [White Balance](#))

White Balance

To set the custom white balance:

1. Go to the **Settings** main level.
2. Select the **White Balance** option.
3. Select from **Red**, **Green**, **Blue**, or **White**.
4. Select a value from **000–255**

Preset select

This option saves three different preset menu option configurations. To record and set these presets, follow the instructions below:

1. Go to the **Settings** main level.
2. Select the **Preset Select** option.
3. Select from **PRESET A**, **PRESET B**, or **PRESET C**.
4. The product will reset. Any changes made to the menu options will be saved to this preset.
 - Default is **PRESET A**. Once changes are made inside **PRESET A**, those changes are saved to **PRESET A** without having to do anything.
 - To create a new preset, highlight and select **PRESET SELECT**. Highlight **PRESET B** or **PRESET C** and press **<ENTER>**. The product will reset automatically. Go back and make the necessary changes in the menu. This will automatically save to the present preset.



Preset sync

To sync all menu presets to other Maverick Force 2 BeamWashes:

1. Go to the **Settings** main level.
2. Select the **Preset Sync** option.
3. Select **NO** or **YES**.
 - To sync other Maverick Force 2 BeamWashes, connect those products via DMX cable.
 - The product can be in any control mode except WDMX. ArtNet, DMX, sACN are all acceptable.
 - All menu options are transferred, including the DMX address. Only the IP address is not affected in the other products.



Only connect Maverick Force 2 BeamWash.

USB Update

To enable or disable software update using USB:

1. Go to the **Settings** main level.
2. Select the **USB Update** option.
3. Select **NO** (disables software update through USB) or **YES** (enables software update through USB).



See the [USB Software Update](#) section for the detailed instructions on how to update the Maverick Force 2 BeamWash software using a USB C connection.

Reset functions

To reset the pan, tilt, or all functions as if from startup:

1. Go to the **Settings** main level.
2. Select the **Reset Function**.
3. Select from **Pan/ Tilt, Zoom, or All**.
4. Select from **NO** or **YES**.

Factory Reset

To reset the product to factory settings:

1. Go to the **Settings** main level.
2. Select the **Factory Settings** option.
3. Select **NO** (to cancel) or **YES** (to reset the product configuration).

Test Mode

Auto Test

To have the Maverick Force 2 BeamWash automatically test all functions one after the other:

1. Go to the **Test** main level.
2. Select the **Auto Test** option.

Manual Test

To manually test an individual function of the Maverick Force 2 BeamWash:

1. Go to the **Test** main level.
2. Select the **Manual Test** option.
3. Select a function to test, from **Pan, Tilt, Red, Green, Blue, White, CTC, Color, Pattern, LED Macro, LED Ma. Speed, LED Ma. Fade, Background, Background Dim, Dimmer, Shutter, Function, or Zoom**.
4. Increase or decrease the value of the selected function from **0–255** to test it.

System Information

The information section of the menu displays statistics and the current status of the product's various functions. To view this information:

1. Go to the **Information** main level.
2. Select from the **Fixture Information, Fan Information, Error Information, or Channel Information** options.
3. Use **<UP>** and **<DOWN>** to view all information.

Zero Adjust Mode

The Zero Adjust Mode provides fine adjustments for the home position of every moving part in the optical path as well as the pan and tilt movements. To adjust these options and prevent borders showing or reduction of the light output:

1. From the main level screen, press and hold **<MENU>** until the passcode screen appears.
2. Enter the passcode: **0920** and press **<ENTER>**.
3. Select the "zero" position to adjust, from **PAN, TILT, ZOOM, MAC4, MAC5, MAC6, RDM4, RDM5, RDM6**.
4. Adjust the "zero" position for the selected function from **000–255**.

Operation

Web Server

The Maverick Force 2 BeamWash Web Server can be accessed by any computer on the same network as the product. It allows network access to system information, settings such as control setup, manual testing of all functions, firmware updates, and the ability to change the Web Server password.

1. Connect the product to power, and set the [Control Mode](#) to **ArtNet** and the [IP Mode](#) to **Static**.
2. Connect the product to a Windows computer with a network cable.
3. On the computer, set the first value of the IP address of the new network to match the first value of the IP address of the product. The IP address of the product is displayed on the [Home Screen](#).
4. Enter the IP address of the product into the URL bar of a web browser on the computer.
5. Enter both the User Name and Password as **admin** to log in.

Information

The Information page on the Web Server displays the current settings and the system information of the Maverick Force 2 BeamWash.

Setup

The Setup page on the Web Server provides options for control, similar to the **Setup** menu on the product. Click **Save Settings** to send the new configuration to the product.

Manual Test

The Manual Test page on the Web Server allows all output functions of the product to be controlled through the browser. To set all functions back to default, click **Reset**.

Firmware Update

The Upgrade page on the Web Server allows the product to be updated with the latest firmware. Go to <https://www.chauvetprofessional.com> to download firmware updates.

Security

The Security page on the Web Server gives the option to change the password to the connected product's web server. Enter the old password (**admin**, by default) and the new password twice, then click **Save Settings** to change the password.

5. Maintenance

Product Maintenance

Dust build-up reduces light output performance and can cause overheating. This can lead to reduction of the light source's life and/or mechanical wear. To maintain optimum performance and minimize wear, clean all lighting products at least twice a month. However, be aware that usage and environmental conditions could be contributing factors to increase the cleaning frequency.

To clean the product, follow the instructions below:

1. Unplug the product from power.
2. Wait until the product is at room temperature.
3. Use a vacuum (or dry compressed air) and a soft brush to remove dust collected on the external surface/vents.
4. Clean all transparent surfaces with a mild soap solution, ammonia-free glass cleaner, or isopropyl alcohol.
5. Apply the solution directly to a soft, lint free cotton cloth or a lens cleaning tissue.
6. Softly drag any dirt or grime to the outside of the transparent surface.
7. Gently polish the transparent surfaces until they are free of haze and lint.




Always dry the transparent surfaces carefully after cleaning them.



Do not spin the cooling fans with compressed air. Damage may result.

Transporting on Truss or Racks

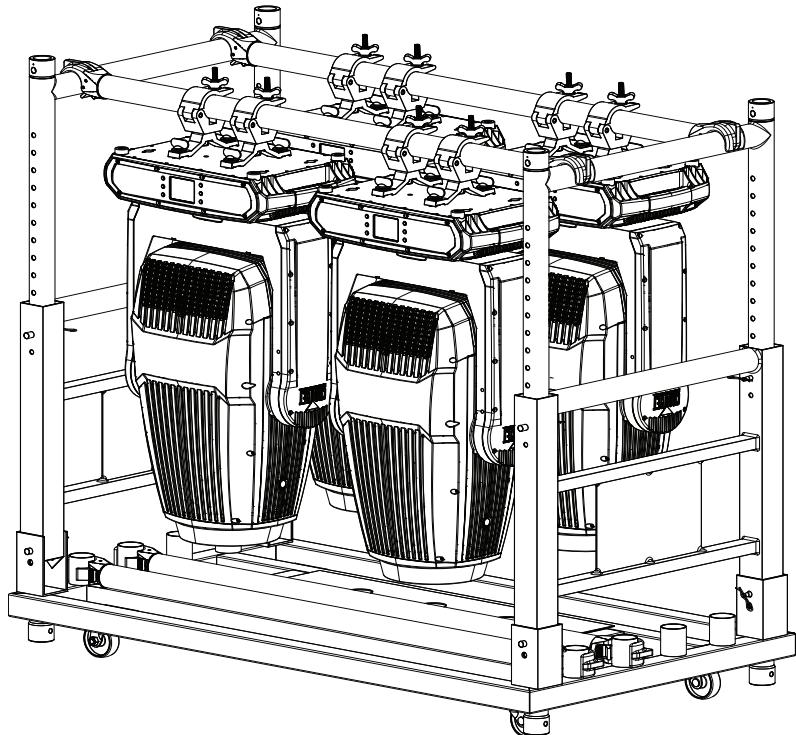

When transporting fixtures in pre-rigged truss and transportation racks, mount fixtures in the vertical position with the lenses facing down and the pan and tilt locks engaged. This is to prevent undue stress on the tilt locks and limit the amount of off-axis bounce on internal components.

Technical Specifications

6. Technical Specifications

Dimensions and Weight

Length	Width	Height	Weight
12.91 in (328 mm)	12.60 in (320 mm)	17.09 in (434 mm)	29.6 lb (13.5 kg)

Note: Dimensions in inches are rounded.

Power

Parameter	100 V, 60 Hz	120 V, 60 Hz	208 V, 60 Hz	230 V, 50 Hz	240 V, 60 Hz
	Power Supply Type		Range		Voltage Selection
Consumption	Switching (internal)		100 to 240 VAC, 50/60 Hz		Auto-ranging
Operating Current	6.35 A	5.23 A	2.96 A	2.68 A	2.55 A
Fuse/Breaker	F 10 A, 250 V	F 10 A, 250 V	F 10 A, 250 V	F 12 0, 250 V	F 10 A, 250 V
Power I/O		U.S./Worldwide		UK/Europe	
Power Input Connector	Seetronic Powerkon IP65		Seetronic Powerkon IP65		
Power Cable plug	Edison plug		Bare wire		

Light Source

Type	Quantity	Power	Current	Lifespan
Quad-color RGBW	12	45 W	3 A	50,000 hours

Photometrics

Temperature	Beam Angle	Field Angle	Cutoff Angle	Zoom Range
2700 to 8000 K	3.7° to 33.6°	5.8° to 44.1°	6.5° to 48.6°	3.7° to 44.1°

ILLUMINANCE

41,355 lux @ 5 m (3.7° field)

1,267 lux @ 5 m (45.1° field)

Acoustics

Parameter	Idle	Max	Eco	Auto	Full
dB(A) @ 1 m	34.9	46.5	34.2	44.7	46.7

Thermal

Maximum External Temperature	Cooling System
113 °F (45 °C)	Fan-assisted Convection

Control

DMX I/O Connector	Ethernet I/O Connector	Channel Range
3-pin/ 5-pin IP rated XLR	Neutrik IP rated RJ45	20Ch, 25Ch, 68Ch, 122Ch, 146Ch, 8Ch-36Ch, 20Ch-48Ch, or 26Ch-96Ch

Ordering

Product Name	Item Name	Item Code	UPC Number
Maverick Force 2 BeamWash	MAVERICKFORCE2BEAMWASH	08011942	781462223700



UL 1573
CSA C22.2 No. 166
E113093



Contact Us

General Information	Technical Support
Chauvet World Headquarters	
Address: 3360 Davie Rd., Suite 509 Davie, FL 33314 Voice: (954) 577-4455 Fax: (954) 929-5560 Toll Free: (800) 762-1084	Voice: (844) 393-7575 Fax: (954) 756-8015 Email: chauvetcs@chauvetlighting.com Website: www.chauvetprofessional.com
Chauvet U.K.	
Address: Pod 1 EVO Park Little Oak Drive, Sherwood Park Nottinghamshire, NG15 0EB UK Voice: +44 (0) 1773 511115 Fax: +44 (0) 1773 511110	Email: UKtech@chauvetlighting.eu Website: www.chauvetprofessional.eu
Chauvet Benelux	
Address: Vaartlaan 9 9800 D deinze Belgium Voice: +32 9 388 93 97	Email: BNLtech@chauvetlighting.eu Website: www.chauvetprofessional.eu
Chauvet France	
Address: 3, Rue Ampère 91380 Chilly-Mazarin France Voice: +33 1 78 85 33 59	Email: FRtech@chauvetlighting.fr Website: www.chauvetprofessional.eu
Chauvet Germany	
Address: Bruno-Bürgel-Str. 11 28759 Bremen Germany Voice: +49 421 62 60 20	Email: DEtech@chauvetlighting.de Website: www.chauvetprofessional.eu
Chauvet Mexico	
Address: Av. de las Partidas 34 - 3B (Entrance by Calle 2) Zona Industrial Lerma Lerma, Edo. de México, CP 52000 Voice: +52 (728) 690-2010	Email: servicio@chauvet.com.mx Website: www.chauvetprofessional.mx

Warranty & Returns

For warranty terms and conditions and return information, please visit our website.

For customers in the United States and Mexico: www.chauvetlighting.com/warranty-registration.

For customers in the United Kingdom, Republic of Ireland, Belgium, the Netherlands, Luxembourg, France, and Germany: www.chauvetlighting.eu/warranty-registration.